



LRG3-HO-TT

3" Round Regressed Gimbal LED High Output 11W - Thin Trim

Project:

Location:

Model #: Qty:

Notes:

DESCRIPTION

3" Round Regressed Gimbal LED
With Integral Driver In Connection Box
Gimbal Yet Air-Tight Without Housing Needed
Thin Trim with **High Output** of our original patented best seller


FEATURES & BENEFITS

3 1/2" Deep - Install Where Ceiling Space Is Limited
1/4" Trim for High-End Contemporary Installations
Type IC Rated - No Housing Required
Air-Tight & Wet Location rated
5CCT user selectable 2700-3000-3500-4000-5000K
or **Dim to Warm** 3000K to 1800K options
CRI 90+ for True Color Rendering
Driver Inside Connection Box - No Junction Box Needed

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening
With Attached Spring Clips
Ceiling Clearance Required: 4"

DIMENSIONS: ID 2 1/2" OD 3 1/8" Cut Out 2 3/4"

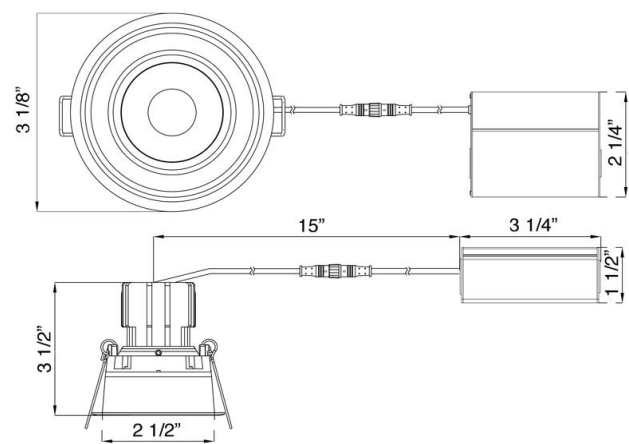

120V TRIAC Dimmable Optional 120V-347V

Driver Included Driver 0-10V Dimmable
Order Separately as
[model # LLL-LD1025T3](#)

ORDERING GUIDE

LRG3-5CCT-HO-TT-WH [5CCT White Trim](#)
LRG3-5CCT-HO-TT-BK [5CCT Black Trim](#)
LRG3-5CCT-HO-TT-ORB [5CCT Oil Rubbed Bronze Trim](#)
LRG3-3018K-HO-TT-WH [Dim to Warm White Trim](#)
LRG3-3018K-HO-TT-BK [Dim to Warm Black Trim](#)
LRG3-3018K-HO-TT-ORB [Dim to Warm Oil Rubbed Bronze Trim](#)

SPECIFICATION

Applications	Sloped Ceilings up to 20°, General Lighting	
Power	11 W	
Color Temperature	5CCT: 2700 3000 3500 4000 5000 DTW 30-18K	
Light Output	920 950 1020 1050 1050 770	
Halogen Equivalent	90 W	
Beam Angle	38° Beam with 20° tilt and 360° rotation	
CRI	90 +	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Insulated Ceiling & Wet Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus	
Warranty	10 Year Residential / 5 Year Commercial	

AVAILABLE TRIMS



White



Black



Oil Rubbed Bronze

ACCESSORIES

Sold Separately



Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)
[20ft - model # EXC20](#)



[13" Flat Mounting Plate model MP234](#)



[26" Flat Rough-In Plate model RIP234](#)



[Flanged Plate with Hanger Bars model FRP234](#)

COMPLIANCE



Type IC & Air-Tight
Wet Location

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6J6 tel 604-538-3090
Delta BC & Mississauga ON