

**LRG6****6" Round Regressed Gimbal LED 15W**

Project:

Location:

Model #:

Qty:

Notes:

DESCRIPTION

6" Round Regressed Gimbal LED 15W

With Integral Driver In Connection Box

Adjustable Yet Air-Tight Without Housing Needed

FEATURES & BENEFITS

3 1/2" Deep - Install Where Ceiling Space Is Limited

Type IC Rated - No Housing Required

Driver Inside Connection Box - No Junction Box Needed

Directional Beam - Great for Sloped Ceilings and Artwork

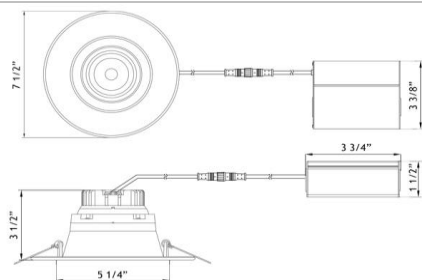
CRI 90+ for True Color Rendering

Available in single CCT, Dim to Warm 30-20K & 30-18K, & 5CCT

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 3 1/2"

DIMENSIONS: ID 5 1/4" OD 7 1/2" Cut Out 5 1/4" to 6"

**AVAILABLE TRIMS****ORDERING GUIDE** Example **LRG6-30K-WH**

	CCT	Trim Finish	Beam
LRG6	- xxK	- xx	blank for 38°
2700K	27K	WH	White
3000K	30K	BK	Black
3500K	35K	ORB	Oil Rubbed Bronze
4000K	40K		
5000K	50K		
DTW 30K-20K	32K	Dim to Warm 3000K to 2000K	
DTW 30K-18K	3018K	Dim to Warm 3000K to 1800K	
5CCT	5CCT	User selectable 27-30-35-40-50K	

SPECIFICATION

Applications	Sloped Ceilings up to 20°, General Lighting						
Energy Used	15 W						
Color Temperature (K)	2700	3000	3500	4100	5000	DTW 30-20	DTW 30-18
Light Output (lm)	1100	1200	1250	1300	1400	900	980
Beam Angle	38° standard / 60° custom						
Tilt	20° tilt and 360° rotation						
CRI	90 +						
Default Driver Input	120V AC			Triac Dimmable			
Optional Driver Input	120V-347V AC			0-10V Dimmable			
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG						
Power Factor	0.95						
Approved Location	Insulated Ceiling & Wet Locations						
IP Rating	IP 54						
Air Tight	Yes						
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)						
Projected Life	70% Light Output at 50,000 Hours						
Certification	cULus, T24						
Warranty	10 Year Residential / 5 Year Commercial						

120V TRIAC Dimmable Driver Included


Optional 120V - 347V Driver

0-10V Dimmable

[model # LLL-LD1535T](#)**ACCESSORIES**

Sold Separately

Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)[20ft - model # EXC20](#)[13" Mounting Plate Flat model # MP6-2](#)[26" Flat Rough-In Plates model # RIP6](#)[Flanged Plate with Hanger Bars - model # FRP6](#)

Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)**Lotus LED Lights USA**250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WAwww.LotusLEDLights.commailing addresses
warehouses**Lotus LED Lights CANADA**1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON