



Lotus
LED
Lights



DESCRIPTION


6" Sloped Round Regressed Gimbal LED With
Integral Driver In Connection Box
Gimbal Yet Air-Tight Without Housing Needed
30° Sloped Trim for Wall Washing and Ceilings from 10° to 50°

FEATURES & BENEFITS

4" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Driver Inside Connection Box - No Junction Box Needed
CRI 90+ for True Color Rendering
Available in single CCT, Dim to Warm 30-20K & 30-18K, & 5CCT

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With
Attached Spring Clips. Ceiling Clearance Required: 4"

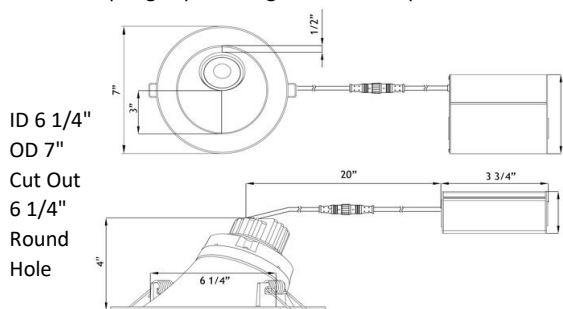

AVAILABLE TRIMS



White

Black

Oil Rubbed Bronze

ORDERING GUIDE Example LRG6-30K-6RSL-WH

LRG6	CCT	Trim Finish	Beam
	- xxK	- 6RSL - xx	blank for 38°
2700K	27K	- 6RSL - WH	White
3000K	30K	- 6RSL - BK	Black
3500K	35K	- 6RSL - ORB	Oil Rubbed Bronze
4000K	40K		
5000K	50K		
DTW 30K-20K	32K	Dim to Warm 3000K to 2000K	
DTW 30K-18K	3018K	Dim to Warm 3000K to 1800K	
5CCT	5CCT	User selectable 27-30-35-40-50K	

LRG6-6RSL

6" Sloped Round Regressed Gimbal LED 15W

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION

Applications	Sloped Ceilings 10° to 50°, Wall Washing						
Energy Used	15 W						
Color Temperature (K)	2700	3000	3500	4100	5000	DTW 30-20	DTW 30-18
Light Output (lm)	1100	1200	1250	1300	1400	900	980
Beam Angle	38° standard / 60° custom						
Tilt	20° tilt and 360° rotation						
CRI	90 +						
Default Driver Input	120V AC			Triac Dimmable			
Optional Driver Input	120V-347V AC			0-10V Dimmable			
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG						
Power Factor	0.95						
Approved Location	Insulated Ceiling & Wet Locations						
IP Rating	IP 54						
Air Tight	Yes						
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)						
Projected Life	70% Light Output at 50,000 Hours						
Certification	cULus, T24						
Warranty	10 Year Residential / 5 Year Commercial						

120V TRIAC Dimmable Driver Included

Optional 120V - 347V Driver

0-10V Dimmable



[model # LLL-LD1535T](#)

ACCESSORIES

Sold Separately



[Flanged Plate with Hanger Bars - model # FRP6](#)



[26" Flat Rough-In Plates model # RIP6](#)



[13" Mounting Plate Flat model # MP6-2](#)



Low Voltage Extension Cables. Max 40 ft Allowed
[6ft - model # EXC6](#)
[20ft - model # EXC20](#)



[Goof Ring OD 7 5/8" White # GR6 Black # GR6-BK](#)



Emergency Back Up Drivers
[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)
[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON