

**DESCRIPTION**

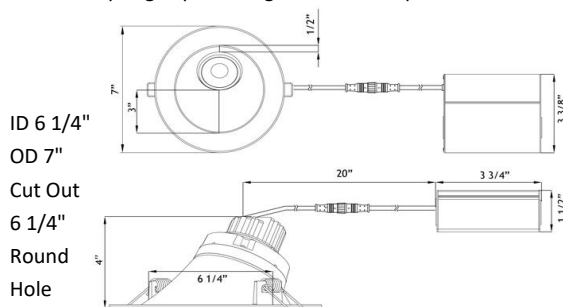
6" Sloped Round Regressed Gimbal LED High Output 18W
with Integral Driver In Connection Box
Gimbal Yet Air-Tight Without Housing Needed
30° Sloped Trim for Wall Washing and Ceilings from 10° to 50°

FEATURES & BENEFITS

4" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Driver Inside Connection Box - No Junction Box Needed
CRI 90+ for True Color Rendering
Available in single CCT, Dim to Warm 30-20K & 30-18K, & 5CCT

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With
Attached Spring Clips. Ceiling Clearance Required: 4"

**AVAILABLE TRIMS**

White

Black

Oil Rubbed Bronze

ORDERING GUIDE Example LRG6-30K-HO-6RSL-WH

	CCT	Trim Finish	Beam
LRG6	- xxK	- HO - 6RSL - xx	blank for 38° -60D for 60°
2700K	27K		
3000K	30K	- 6RSL - WH	White
3500K	35K	- 6RSL - BK	Black
4000K	40K	- 6RSL - ORB	Oil Rubbed Bronze
5000K	50K		
DTW 30K-20K	32K	Dim to Warm 3000K to 2000K	
DTW 30K-18K	3018K	Dim to Warm 3000K to 1800K	
5CCT	5CCT	User selectable 27-30-35-40-50K	

LRG6-HO-6RSL**6" Sloped Round Regressed Gimbal LED High Output 18W**

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION

Applications	Sloped Ceilings 10° to 50°, Wall Washing	
Energy Used	18 W	
Color Temperature (K)	2700 3000 3500 4100 5000 DTW 30-20 DTW 30-18	
Light Output (lm)	1500 1550 1600 1650 1700 1150 1250	
Beam Angle	38° standard / 60° custom	
Tilt	20° tilt and 360° rotation	
CRI	90 +	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Insulated Ceiling & Wet Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus, T24	
Warranty	10 Year Residential / 5 Year Commercial	

120V TRIAC Dimmable Driver Included

Optional 120V - 347V Driver

0-10V Dimmable

[model # LLL-LD2050T](#)**ACCESSORIES**

Sold Separately

[Flanged Plate with Hanger Bars - model # FRP6](#)[26" Flat Rough-In Plates model # RIP6](#)[13" Mounting Plate Flat model # MP6-2](#)

Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)[20ft - model # EXC20](#)[Goof Ring OD 7 5/8" White # GR6 Black # GR6-BK](#)

Emergency Back Up Driver

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)NOTE: Compatible only if 0-10V driver
is used and 0-10V wires connected[model # LLL-LD2050T](#)**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON