

Technical Specifications (continued)

Reflector:

Powder-coated sheet metal

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:


Recessed into T-grid ceiling. Surface and recessed mounting kits available for drywall ceilings.

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

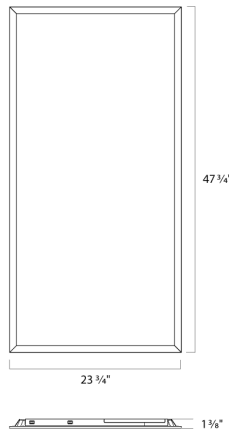

Features

- 0-10V dimming
- 100,000-Hour LED lifespan
- 5-Year, limited warranty
- 2 per case, must order in case quantity increments

Ordering Matrix

Family	Size/Wattage	Color Temp	Finish	Driver	Battery Backup
T17FA	2X4				/E
	2X2 = 2' x 2', 40/30/20W 1X4 = 1' x 4', 40/30/20W 2X4 = 2' x 4', 50/40/30W	Blank = 3500/4000/5000K	Blank = White	Blank = 120-277V, 0-10V Dimming	Blank = None /E = Battery Backup