

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	60/50/40W
120V	0.48A/0.40A/0.32A	Color Temp	2700K/3000K/3500K/4000K/5000K
208V	0.00A/0.00A/0.00A	Color Accuracy	91-94 CRI
240V	0.00A/0.00A/0.00A	L70 Lifespan	100,000 Hours
277V	0.00A/0.00A/0.00A	Lumens	5715-8190 lm
Input Watts	38-58.2W	Efficacy	136.3-156.4 lm/W

## Technical Specifications

### Field Adjustability

#### Field Adjustable:

Field Adjustable Light Output:  
60/50/40W (factory default 60W)  
Color Temperature Selectable:  
2700K, 3000K, 3500K, 4000K and 5000K (factory default 4000K)

### Compliance

#### UL Listed:

Suitable for dry locations

#### IP Rating:

IP20

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Temperature:

2700/3000/3500/4000/5000K CCT Adjustable

### Electrical

#### Driver:

Constant Current, Class 1, 120V, 60 Hz, 120V  
60W: 0.56A  
50W: 0.47A  
40W: 0.38A

#### Dimming Driver:

120V TRIAC Dimmers

#### Aux Power Supply:

No

#### Dim to Off:

No

#### Surge Protection:

Ring Wave L-N:2.5 kV, LN-PE 2.5 kV

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

#### Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

#### Lens:

Polycarbonate lens

#### Housing:

Aluminum

#### Finish:

Formulated for high durability and long-lasting color

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

### Installation

#### Mounting:

H-Track Mount

### Optical

#### Optics:


90°

### Other

#### 5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

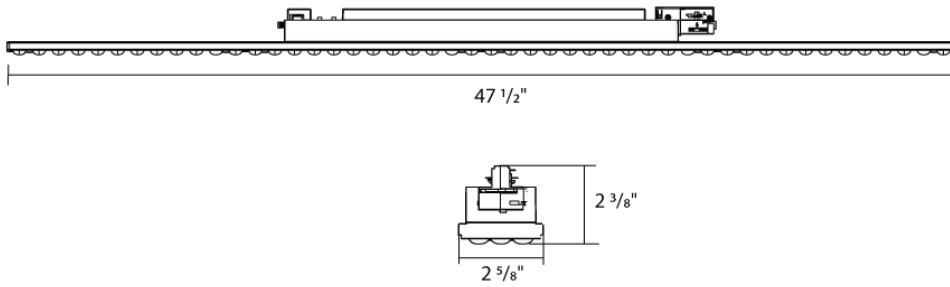

Ordering Matrix

Family	Size/Wattage	Mounting	Color Temp	Optics	Finish	Driver
TKBEAM	4					
	2 = 2 ft (30/22/15W) 4 = 4 ft (60/50/40W)	Blank = H-Track Mount	Blank = 2700/3000/3500/4000/5000K	Blank = 90°	Blank = White B = Black	Blank = 120V, TRIAC Dimming