



Weight: 1.8 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	N/A	Watts	N/A
120V	N/A	Color Temp	N/A
208V	N/A	Color Accuracy	N/A
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	N/A
Input Watts	N/A	Efficacy	N/A

Technical Specifications

Performance

Product Type:

LED Tape Light Driver Wet Rated

Description:

Driver IP67 96W 120-277V for Lightcloud Blue ARCTAPE, FLEXTAPE, NEOFLEX

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Power Factor:

0.95

Dimmable:

Yes via the Lightcloud Blue mobile app and devices.

This driver will not operate properly when connected to a standard (incandescent) dimmer or dimming control.

Input Voltage:

120-277V

Output Power:

96W Max

Output Voltage:

24VDC

Output Current:

4A

Operating Frequency:

47-63Hz

Operating Temperature:

-4°F to 113°F (-20°C to 45°C)

Construction

Material Construction:

Dedicated line voltage and low-voltage wiring compartments. Multiple 7/8" knock-outs for easy wire configuration.

Compliance

Listings:

UL8750

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

IP Rating:

IP67

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other


Compatible Products:

Compatible with the following ARCTAPE products: TIC/LCB

Compatible with the following FLEXTAPE products: TOS/LCB, TOS/RGB

Compatible with the following NEOFLEX products: TNF/LCB, TNF/RGB

Dimensions

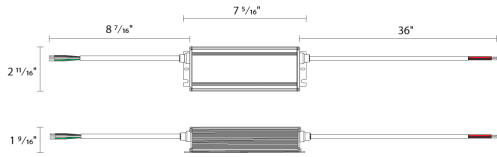

Features

120-277V Universal input voltage