

PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

Vapor Tight Wattage & CCT Selectable

VE Value Series


Product Description:

A cost-effective vapor tight fixture with tremendous flexibility, the VE Series is both wattage and CCT selectable and provides an emergency battery backup option. This durable, IP65 rated linear fixture with stainless steel clips is ideal for commercial and industrial environments where water, humidity, and dust may occur, including stairwells, parking garages, utility areas and agricultural applications.

Features:

- CCT and Wattage selectable (9 possible combinations with each fixture)
- 0-10V dimming standard
- CRI: ≥ 80
- Universal voltage 120-277V
- L70 lumen maintenance of 50,000 hours
- Default setting for WCS models is set to lower wattage and 4000K
- UL Listed - Suitable for wet locations

Ordering Information

| FAMILY | SIZE | VOLTAGE | WATTAGE SELECT** | CCT SELECT** | BATTERY BACKUP OPTIONS* |
|---------------------------------------|------------------|-------------|----------------------------------|---------------------------------------------|----------------------------------------|
| VE= Linear Vapor Tight - Value Series | 4= 48" 8= 96" | U= 120-277V | 23W= 23/35/47W 65W= 60/70/85W | CS= Color Selectable (3500K/4000K/5000K) | [BLANK]= None EM= Emergency Back-up |

*EM unit is UL924 classified
 **Default setting for WCS models is set to lowest wattage and 4000K

Stocked Items

| ORDER CODE | MODEL NUMBER | DLC PRODUCT ID # | DLC CLASSIFICATION | DLC PRIMARY USE DESIGNATION |
|------------|--------------|------------------|--------------------|------------------------------------------------------------|
| 111226 | VE-4U23WCS | S-6ZDVTQ | DLC Standard | Direct Linear Ambient Luminaires |
| | | S-4TP6RL | | Low-Bay Luminaires for Commercial and Industrial Buildings |
| 111228 | VE-4U23WCSEM | S-6ZDVTQ | | Direct Linear Ambient Luminaires |
| | | S-4TP6RL | | Low-Bay Luminaires for Commercial and Industrial Buildings |
| 111227 | VE-8U65WCS | S-479C4Y | | Direct Linear Ambient Luminaires |
| | | S-S1XYLK | | Low-Bay Luminaires for Commercial and Industrial Buildings |
| 111229 | VE-8U65WCSEM | S-479C4Y | | Direct Linear Ambient Luminaires |
| | | S-S1XYLK | | Low-Bay Luminaires for Commercial and Industrial Buildings |

Accessories (Sold Separately)

| ORDER CODE | MODEL NUMBER | DESCRIPTION | IMAGE |
|------------|--------------|--------------------------------------|-------|
| 74139 | MLCHKLSV15 | CABLE KIT 15' LOOP X TOGGLE Y 1 PAIR | |

Vapor Tight Wattage & CCT Selectable

VE Value Series

Specifications

| Specifications | VE-4U23WCS | | |
|-------------------------------------|-------------------------------------------------------------------------------------------------|---------|---------|
| Size | 4 ft. | | |
| Nominal Wattage (W)* | 23W | 35W | 47W |
| Lumens Delivered (lm)*** | 3,200 lm | 4700 lm | 6240 lm |
| Nominal Efficacy (lm/W)*** | 150 lm/W | | |
| Lumens Delivered at BBU mode (lm)** | 1100 lm - for 90 minutes, when fully charged | | |
| Color Temperature (K)* | 3500K, 4000K, 5000K | | |
| CRI | ≥80 | | |
| Calculated L70 Lumen Maintenance | ≥50,000 hours | | |
| Dimming Technology | 0-10V | | |
| Dimming Range | 10-100% | | |
| Input Voltage | 120-277V AC | | |
| Power Factor | ≥0.9 | | |
| Housing | Polycarbonate | | |
| Diffuser | Polycarbonate Lens | | |
| Product Weight | 4.2 lbs | | |
| Humidity | 10-80% RH, non-condensing | | |
| Operating Temperature | -4°F to 104°F (-20°C to 40°C), except for EM models. EM models: 50°F to 104°F (10°C to 40°C) | | |
| Certifications | cULus listed, FCC, Rohs Complaint. IP65 | | |
| Qualifications | DLC Standard | | |
| Environment | Wet Locations | | |
| Warranty | 5 Years. Check maxlite.com/warranties for details | | |

*Fixtures are set to lowest wattage and 4000K as default factory setting

**Lumens delivered at BBU mode varies based on wattage and CCT setting

*** Lumens and efficacy listed on the Spec table is based on 4000K CCT

Vapor Tight Wattage & CCT Selectable


VE Value Series

Specifications


| | VE-8U65WCS | | |
|-------------------------------------|------------------------------------------------------------------------------------------------|-----------|-----------|
| Size | 8 ft. | | |
| Nominal Wattage (W)* | 60W | 70W | 85W |
| Lumens Delivered (lm) | 8,800 lm | 10,000 lm | 11,700 lm |
| Nominal Efficacy (lm/W) | 155 lm/W | | |
| Lumens Delivered at BBU mode (lm)** | 2300 lm - for 90 minutes, when fully charged | | |
| Color Temperature (K)* | 3500K, 4000K, 5000K | | |
| CRI | ≥80 | | |
| Calculated L70 Lumen Maintenance | ≥50,000 hours | | |
| Dimming Technology | 0-10V | | |
| Dimming Range | 10-100% | | |
| Input Voltage | 120-277V AC | | |
| Power Factor | ≥0.9 | | |
| Housing | Polycarbonate | | |
| Diffuser | Polycarbonate Lens | | |
| Product Weight | 8.3 lbs | | |
| Humidity | 10-80% RH, non-condensing | | |
| Operating Temperature | -4°F to 104°F (-20°C to 40°C), except for EM models. EM models: 41°F to 104°F (5°C to 40°C) | | |
| Certifications | cULus listed, FCC, Rohs Compliant. IP65 | | |
| Qualifications | DLC Standard | | |
| Environment | Wet Locations | | |
| Warranty | 5 Years. Check maxlite.com/warranties for details | | |

*Fixtures are set to lowest wattage and 4000K as default factory setting
 **Lumens delivered at BBU mode varies based on wattage and CCT setting


Dimensions

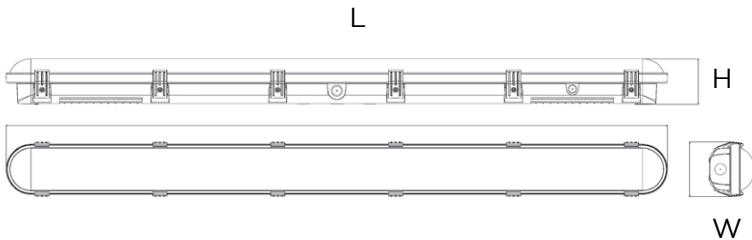

Mounting Hole Dimensions for 4ft



Mounting Hole Dimensions for 8ft



| PRODUCT | A (L) | B (W) | C (H) | LI | L2 | L3 |
|------------|-------|-------|-------|-------|-------|-------|
| VE-4U23WCS | 47.3" | 3.8" | 3.2" | 1.04" | 33.7" | N/A |
| VE-8U65WCS | 94.1" | 3.8" | 3.2" | 1.04" | 33.7" | 4.72" |

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.