



Color: Bronze

Weight: 0.8 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

|             |                  |
|-------------|------------------|
| Type        | Constant Current |
| 120V        | 0.10A            |
| 208V        | N/A              |
| 240V        | N/A              |
| 277V        | N/A              |
| Input Watts | 9W               |

LED Info

|                |                           |
|----------------|---------------------------|
| Watts          | 9W                        |
| Color Temp     | 2700/3000/3500/4000/5000K |
| Color Accuracy | 90 CRI                    |
| L70 Lifespan   | N/A                       |
| Lumens         | 750 lm                    |
| Efficacy       | 83                        |

Technical Specifications

Performance

Product Type:

Round, Edge-Lit Wafer

Description:

Round, edge-lit wafers with a slim form factor and selectable color temperatures. Available in 3", 4", 5", 6", and 8" models with either smooth or baffle trim, all with 90 CRI and TRIAC/ELV dimming.

Wattage Equivalency:

40W CFL

Input Wattage:

9W

Lumens (Nominal):

750lm

Efficacy:

83lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Driver:

Constant Current, Class 2 120V 60 Hz; 120V: 100mA

THD:

≤20%

Power Factor:

≥0.9

Dimmable:

Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.

Input Voltage:

120V

Operating Frequency:

60 Hz

Operating Temperature:

-4°F to 104°F (-20 to 40°C)

Flicker:

≤30%

LED Characteristics

Beam Angle:

110°±10°

Color Temperature:

Default: 5000K  
Field adjustable via dip switch  
2700/3000/3500/4000/5000K

Color Tuning:

No

Color Accuracy (CRI):

90 CRI

Natural Spectrum:

No

R9 Value:

High color performance with R9 greater than 50

Color Consistency:

<4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warrantied to Shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

## Technical Specifications (continued)

### Installation

#### Remote Driver/Junction Box:

Die formed metal driver / junction box with captive hinged junction box cover. Listed for Maximum of (4) 12AWG through branch circuit conductor suitable for 90° C permitted in box. Easy to wire in 2in/2out (plus ground) applications. (4) conduit pry-outs. (3) quick snap-in connectors for quick and reliable line voltage connections. Integral mounting facilitates direct mounting to building structure or mounting frame.

#### Cable:

FT5 Plenum rated cable (per UL2043)

#### Mounting:

No housing is required, two tension steel spring clips secure luminaire to ceiling. Accommodates ceiling thickness up to 15/16". New construction frames are available.

### Construction

#### Size:

4"

#### Shape:

Round

#### Finish:

Bronze

#### Enclosure Material:

Metal+Plastic

#### Trim Style:

Baffle

#### Lens Finish:

Frosted

#### Lens:

Polycarbonate light diffuser distributes light evenly and smoothly for general lighting applications

### Compliance

#### Listings:

UL Listed

#### Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

#### IC Rated:

Suitable for direct contact with insulation. Type IC inherently protected, suitable for direct contact to air permeable insulation and cULus listed for damp locations. Not for use in direct contact with spray foam insulation, consult NEMA LSD57-2013.

#### Energy Star Approved:

This product is ENERGY STAR® Version 2.2 Certified

#### Certification Model Number:

DLW0159(WFRL4R99FA120BRZB)

#### California Title 20 Compliant:

No

#### California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6.

#### California Energy Commission (CEC) Status:

Lawful for Sales in California

#### NEC Compliant:

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C3).

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### RoHS:

Mercury and UV free. RoHS-compliant components.

#### FCC:

Complies with Part 15 of the FCC Rules

#### Trade Agreements Act Compliant:


This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

### Other

#### 5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

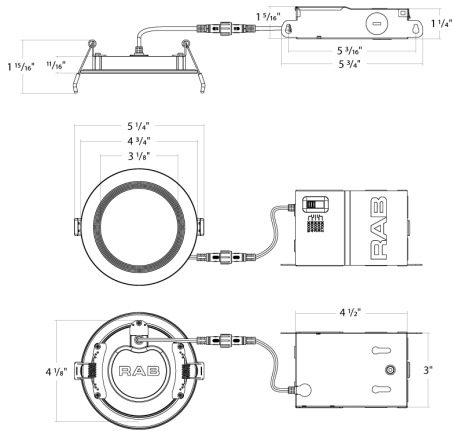

Features

- 5 color temperatures in 1 SKU (2700K, 3000K, 3500K, 4000K, 5000K)
- Super slim edge-lit fixture for thin fixture depth
- No recessed housing or J-box required
- New construction or retrofit applications
- UL wet location rated
- Smooth diffused uniform light distribution
- Dimmable down to 10% on compatible dimmers
- Spring loaded retention clips
- Robust, die cast aluminum construction
- IC and airtight rated
- 5-Year, No-Compromise Warranty

Ordering Matrix

| Family | Size   | Shape      | Wattage      | CRI/Color Temp                               | Driver        | Finish       | Trim       | Depth            |
|--------|--------|------------|--------------|----------------------------------------------|---------------|--------------|------------|------------------|
| WFRL   | 4      | R          | 9            | 9FA                                          | 120           | BRZ          | B          |                  |
|        | 4 = 4" | R = Round  | 14 = 14W     | 9FA = 90 CRI, 2700/3000/3500/4000/5000K CCT  | 120 = 120V    | W = White    | B = Baffle | Blank = Standard |
|        | 5 = 5" | S = Square | 23 = 23W     | Adjustable                                   | D = 120V/277V | B = Black    | S = Smooth | S = Shallow      |
|        | 6 = 6" |            | 13 = 13W     | 9CCT = 90 CRI, 2700/3000/3500/4000/5000K CCT |               | BRZ = Bronze |            |                  |
|        | 8 = 8" |            | 12 = 12W     | Adjustable                                   |               |              |            |                  |
|        | 3 = 3" |            | 10.5 = 10.5W |                                              |               |              |            |                  |
|        |        |            | 9 = 9W       |                                              |               |              |            |                  |
|        |        |            | 6 = 6W       |                                              |               |              |            |                  |