



Color: Bronze

Weight: 20.7 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	250/220/190/160W
120V	2.10A	Color Temp	3000/4000/5000K
208V	1.25A	Color Accuracy	83-84 CRI
240V	1.08A	L70 Lifespan	100,000 Hours
277V	0.95A	Lumens	23,859-36,299 lm
Input Watts	156.9-242.1W	Efficacy	138.3-162.3 lm/W

**Technical Specifications**

**Field Adjustability**

**Optical Field Adjustability:**

90°, 75° and 55°

**Field Adjustable:**

Field Adjustable Light Output:  
250W/220W/190W/160W (factory default 250W)  
Color Temperature Selectable:  
3000K, 4000K and 5000K (factory default 4000K)

**Compliance**

**UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-2HBM9K

**Electrical**

**Driver:**

250W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 2.10A, 208V: 1.25A, 240V: 1.08A, 277V: 0.95A

220W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 1.85A, 208V: 1.10A, 240V: 0.95A, 277V: 0.83A

190W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 1.60A, 208V: 0.95A, 240V: 0.82A, 277V: 0.72A

160W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 1.36A, 208V: 0.80A, 240V: 0.69A, 277V: 0.61A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**THD:**

2.42% at 120V, 5.9% at 277V

**Power Factor:**

99.9% at 120V, 94.2% at 277V

**Surge Protection:**

L/N-PE: 2.5kV, L-N: 2.5kV

**Photocell:**

120V-277V Twistlock photocell included

**Shorting Cap:**

Shorting Cap included for Twistlock Receptacle

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Color Consistency:**

3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color  
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Performance**

**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Performance Data:**

[Click here for the X22-250 performance data](#)

## Technical Specifications (continued)

### Wattage Equivalency:

250W: Replaces up to 1000W Metal Halide (MH) or 750W High Pressure Sodium (HPS)

220W: Replaces up to 1000W Metal Halide (MH) or 600W High Pressure Sodium (HPS)

190W: Replaces up to 750W Metal Halide (MH) or 600W High Pressure Sodium (HPS)

160W: Replaces up to 750W Metal Halide (MH) or 400W High Pressure Sodium

---

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -30°C (-22°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 50°C (122°F)

#### Housing:

Die-cast aluminum

#### Lens:

Tempered glass

#### Effective Projected Area:

1 Fixture: 0.759 ft<sup>2</sup>

2 Fixtures at 90°: 1.985 ft<sup>2</sup>

2 Fixtures at 180°: 1.517 ft<sup>2</sup>

3 Fixtures at 90°: 2.744 ft<sup>2</sup>

4 Fixtures at 90°: 2.744 ft<sup>2</sup>

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

---

### Installation

#### Mounting:

Slipfitter with tilt angle in 10° increments. Trunnion kit is included.


---

### Other

#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

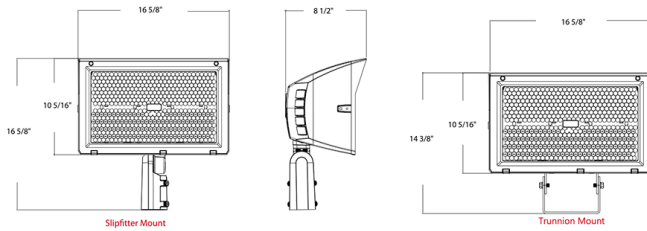

Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Mounting	Finish	Beam Angle	Driver	Options
X22	-	250	Blank				
	35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	Blank = 3000/4000/5000K CCT Adjustable	Blank = Knuckle Mount Installed with Yoke Kit Included Blank = Knuckle Mount Installed with Trunnion Kit Included Blank = Slipfitter Mount Installed with Trunnion Kit Included	Blank = Bronze W = White	Blank = Selectable Beam Angle (Medium to Very Wide Flood 55-100°)	Blank = 120-277V /480 = 480V, 0-10V Dimming	Blank = Selectable On/Off Photocell

X22-20 & X22-35: Knuckle mount installed with yoke mount included.  
 X22-60 & X22-80: Knuckle mount installed with trunnion mount included.  
 X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.