



Date:

Watts	60/50/40W
Color Temp	Field Adjustable 3000/4000/5000K
Color Accuracy	82-85 CRI
L70 Lifespan	100,000 Hours
Lumens	5,502-8,728 lm
Efficacy	132.4-161.2 lm/W

Page 1 of 3

Technical Specifications (continued)

Construction

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Housing:

Precision die-cast aluminum housing and arm

Effective Projected Area:

EPA = 0.27

Lens:

Polycarbonate lens

Reflector:

Polyethylene Terephthalate (PET)

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:


Mounts on wall or existing arm/pole YARM24 (1 5/8" diameter pipe)

Other

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

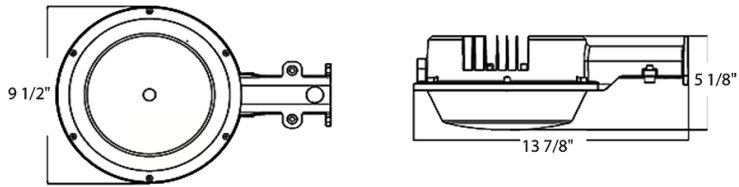

Features

- 100,000-Hour LED lifespan
- 120-277V Integrated dusk to dawn photocell
- 0-10V dimming, standard
- 5-Year, limited warranty