

V (2700K TO 6000K)

+24VDC

RGBTW (2700K TO 6000K)

+24VDC

RGBTW (2700K TO 6000K)



SPEKTRUM+

TRULUX LIGHTING SYSTEMS
RGB+TW TAPE LIGHT

TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES



Features

- RGB+Tunable CCT color mixing capability
- 3-in-1 RGB LEDs with Alternating Tunable CCT 2700K & 6000K LEDs
- Excellent color rendering of 90+ CRI
- Up to 410 lumens per foot performance
- Consumes up to 7 watts per foot
- Cuttable every 3.94" (100mm)
- 13.1 foot max run
- Rated IP54 - Unjacketed
- 50,000 hours rated life

Available CCT



RGB + Tunable CCT

Control Options

- RGB+TW DMX Controls
 - Requires Adaptive Driver + DMX Receiver
- Auxiliary DMX Controls
 - Requires Adaptive Driver + DMX Receiver
- RGB+TW In-line Controller

Listing / Ratings





TRULUX™ RGB+TW

RGB + Tunable CCT tape light is the ultimate option in color changing RGB linear lighting technology. With RGB+TW, not only do you have a virtually unlimited RGB palette of color combinations, you also have the ability to adjust true white light ranging from 2700K up to 6000K. Providing intense color saturation, transition effects, and fade to white lighting effects for limitless color combinations.

Technical Information

Series	SPTL-RGBTW
Input Voltage	24V DC
CCT	RGB + Tunable CCT (2700K-6000K)
CRI	90+
Wattage	Up to 7W per foot
Lumens	Up to 410Lm per foot
Max Run	13.1 ft
Cutttable	Every 3.94in (100mm)
IP Rating	IP54 - Unjacketed
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

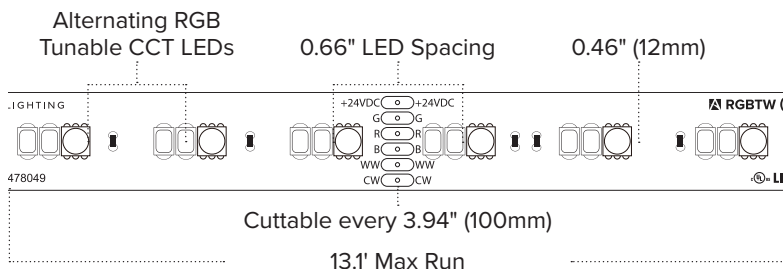




SPTL-RGBTW SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
SPTL-RGBTW	24V DC	RGB+TW	13.1 ft	410Lm/ft	7W/ft	IP54	90+	3.94" (167mm)
SPTL-RGBTW-100	24V DC	RGB+TW	100 ft	410Lm/ft	7W/ft	IP54	90+	3.94" (167mm)

SPTL-RGBTW (IP54) 13.1ft Reels include: Attached 3ft lead wires | (3) TL-6PWR
 SPTL-RGBTW-100 (IP54) 100ft Reels include: Attached 3ft lead wires | (5) TL-6PWR

RGB+TW ACCESSORIES


ITEM NUMBER	DESCRIPTION
TL-6PWR-HD	6' HD Power Feed (IP54)
TL-6SPL-HD	HD Splice (IP54)
TL-6JUMP6-HD	6" HD Linking Cable (IP54)
TL-6JUMP24-HD	24" HD Linking Cable (IP54)
WIRE-15-6PIN	15ft (20/6) Wire Spool
WIRE-CMP-100-6PIN	100' (16/6) In-wall Rated Wire Spool
INLINE-RGBTW-CTRL	Simple Select RGB+TW Controller
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

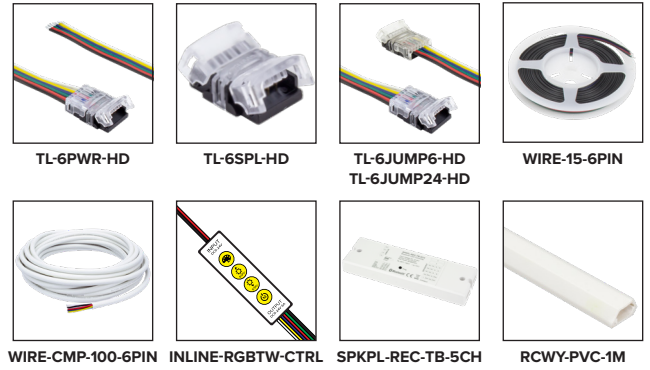


Building an RGB+TW Trulux™ System?

See pages (115-118) for RGB+TW DMX controller & receiver

Smart Receiver Set-up

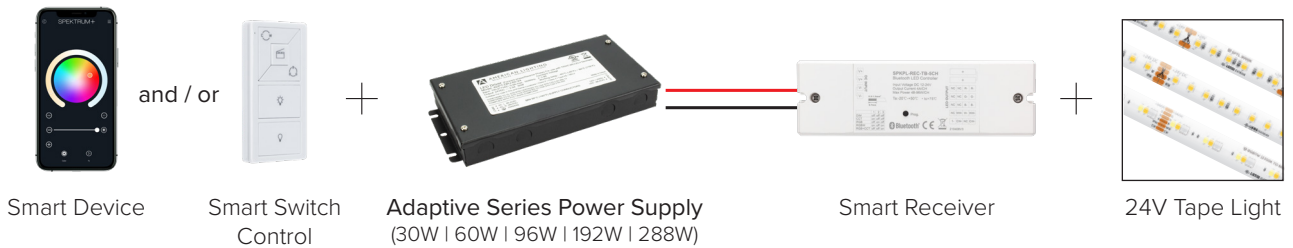

DMX Color Changing Set-up

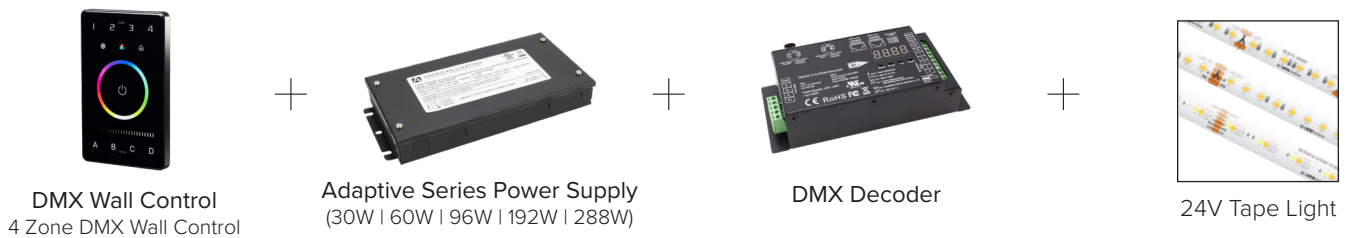

Wireless DMX Color Changing Set-up

