

# ADAPTIVE PRO 288W

## 5-in-1 Dimmable 24V Power Supply

The Adaptive Pro 5-in-1 dimmable Class 2 drivers are designed to operate with any standard MLV / ELV / Incandescent TRIAC (forward phase) dimmer switch or can also be used with secondary side controls systems. Encased in a low profile aluminum enclosure that includes knock-outs for easy installation in any low voltage application.


- Slim and compact 24V DC constant voltage hardwire driver
- Dedicated line voltage and low voltage wiring compartments
- Multiple 7/8" knock-outs for easy wire configuration
- Short circuit, over-voltage, over-temperature, overload protections
- 5-in-1 Forward and Reverse Phase Dimming:  
ELV / MLV / TRIAC / 0-10V / 1-10V / 10V PWM / Potentiometer
- cULus Listed Wet location rated
- Class 2, Type HL, FCC Compliant




ADAPTIVE PRO - 288W QUICK SPECS	
SERIES	ADPTPRO-DRJ 288W
INPUT VOLTAGE	100-277V AC
INPUT FREQUENCY	47-63Hz
OUTPUT VOLTAGE	24V DC
RATED CURRENT	3 x 4A
POWER FACTOR	0.99@120V / 0.95@277V
MIN LOAD	3 x 9.6W
MAX LOAD	288W (3 x 96W)
EFFICIENCY	> 87% (120V) / 91% (277V)
DIMENSIONS	11.92" (303mm) L x 4.33" (110mm) W x 1.88" (48mm) H
DIMMING	Phase (ELV/MLV/TRIAC) / 0-10V / 1-10V / 10V PWM / Potentiometer
OPERATING TEMP	-40°F to 140°F (-40°C to 60°C)
RATING	cULus Listed for Wet locations

ADAPTIVE PRO - 288W ORDERING INFORMATION	
ITEM NUMBER	DESCRIPTION
ADPTPRO-DRJ-288-24	Adaptive Pro 24V - 288W (3 x 96W) Power Supply

### ADAPTIVE PRO - 288W QUICK SET UP



Dimmer Switch

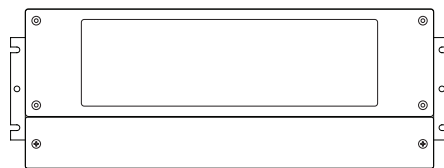

Adaptive Pro 288W Power Supply



24V LED Fixture

PROJECT: \_\_\_\_\_



TYPE: \_\_\_\_\_

LOCATION: \_\_\_\_\_


CATALOG NUMBER: \_\_\_\_\_



### ADAPTIVE PRO - 288W QUICK DIMENSIONS

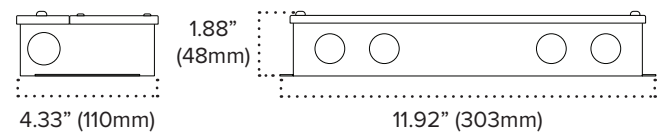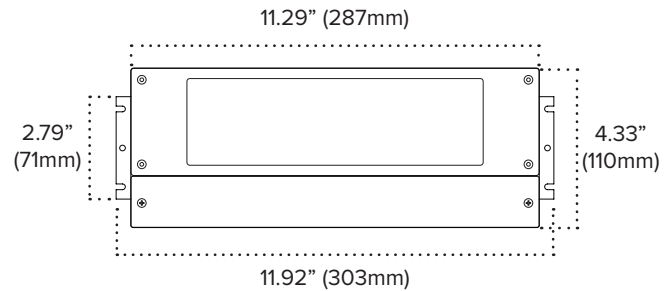

**ADAPTIVE PRO - 288W TRIAC/ELV/MLV DIMMING WIRING DIAGRAM**

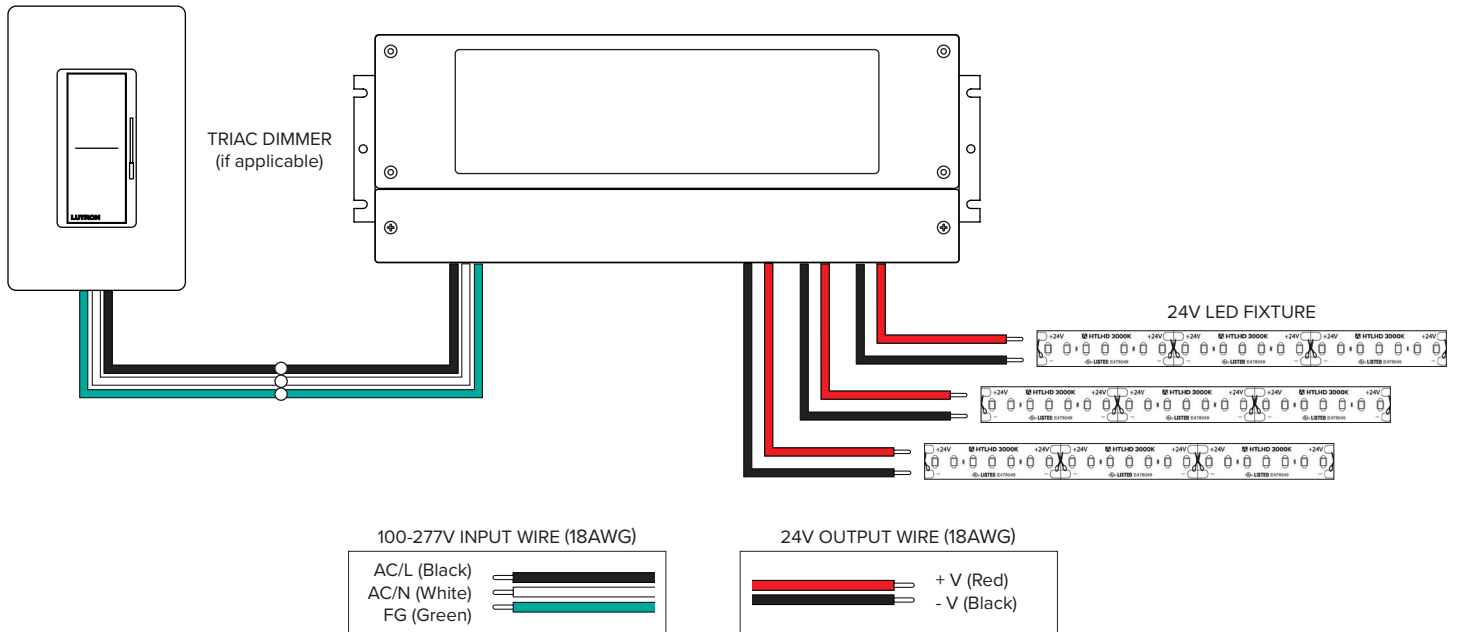

**ADAPTIVE PRO - 288W 0-10V WIRING DIAGRAM**

