

SENIK FLEX SERIES TAPE LIGHT

24V DC Flexible Optic Wall Washer

Senik Flex is a high performance optic based flexible linear light that allows for beam control in wall washing and grazing distributions for limitless design scenarios. Fully encased and rated for outdoor use, Senik Flex is available in 3000K and 4000K CCT with up to 510Lm per foot performance.

- Available in 3000K and 4000K color temperatures
- 90+ color rendering index
- Lumen output up to 610Lm per foot
- 30° or 15°x50° beam pattern
- Cuttable every 12" with 33ft max run (Factory assembled)
- Features fully encased IP67 rating suitable for outdoor use
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor and outdoor use
- 50,000 hours rated life



PROJECT: _____

TYPE: _____

LOCATION: _____

CATALOG NUMBER: _____



SENIK FLEX SERIES QUICK SPECS


VOLTAGE	24V DC
WATTAGE	5.8W / ft
LUMENS	Up to 610Lm / ft
CCT OPTIONS	3000K / 4000K
CRI	90+
MAX RUN	33ft
CUTTING POINTS	12" (Factory Assembly Required - Not Field Cuttable)
IP RATING	IP67 - Encased
DIMMING	TRIAC / ELV (5-100%)
DIMENSIONS	0.78" (20mm) W x 0.37" (9.5mm) H
BEAM ANGLE	30° / 15°x50°
OPERATING TEMP	-20°C (-4°F) to 40°C (104°F)
AMBIENT TEMP	-30°C (-22°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Wet Location
RATED LIFE	50,000 Hours

SENIK FLEX SERIES IP RATINGS




IP67 (Encased)
Fully encased tape light in silicone injected jacketing that allows for wet location applications.
Best suited: Indoor & Outdoor wet locations

SENIK FLEX SERIES CHANNEL DIMENSIONS

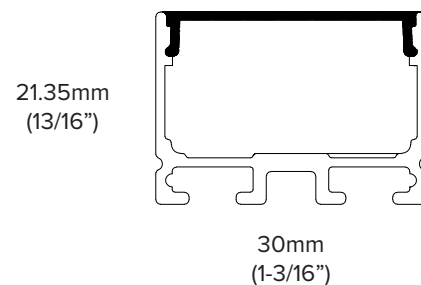


SENIK FLEX SERIES QUICK LOOK

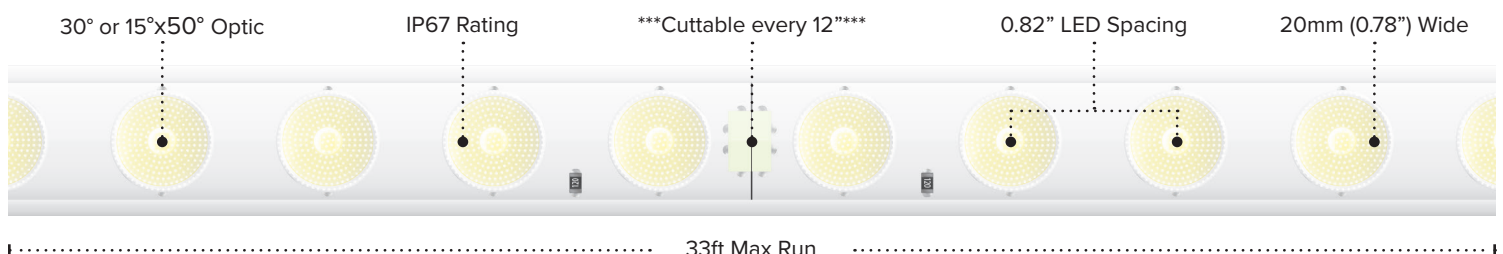

SENIK FLEX SERIES ORDERING INFORMATION

Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery

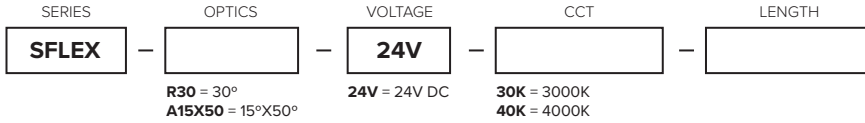

Custom Cuts: Specify desired length according to cut increment in INCHES (see page 3 for cut increment chart). Assembly Fee per length of Senik Flex Custom Cut. Custom orders are deemed Final Sale and are not able to be returned or refunded.

SENIK FLEX SERIES ASSEMBLY FEES

ITEM NUMBER	DESCRIPTION
CC-LF-SFLEX-R30	Conkit, End Cap, and UV Cure Assembly
CC-LF-SFLEX-A15X50	Conkit, End Cap, and UV Cure Assembly

SENIK FLEX SERIES SPECIFICATION DETAILS


ITEM NUMBER	VOLTAGE	CCT	LENGTH	OPTICS	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
SFLEX-R30-24V-30K-CC	24V DC	3000K	Custom Cut	30°	550Lm / ft	5.8W / ft	IP67	90+	*** 12" ***	33ft
SFLEX-R30-24V-40K-CC	24V DC	4000K	Custom Cut	30°	600Lm / ft	5.8W / ft	IP67	90+	*** 12" ***	33ft
SFLEX-A15x50-24V-30K-CC	24V DC	3000K	Custom Cut	15°x50°	540Lm / ft	5.8W / ft	IP67	90+	*** 12" ***	33ft
SFLEX-A15x50-24V-40K-CC	24V DC	4000K	Custom Cut	15°x50°	610Lm / ft	5.8W / ft	IP67	90+	*** 12" ***	33ft

SENIK FLEX SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
SFLEX-CLIPS	Surface Mount Clips (Qty 10)
SFLEX-SW-CHAN-4	4ft Aluminum Channel w/lens
SFLEX-SW-CHAN-FEED	Aluminum Channel Feed Cap
SFLEX-SW-CHAN-END	Aluminum Channel End Cap
SFLEX-SW-CHAN-CLIP	Channel Mounting Clips (Qty 10)
SFLEX-SW-CHAN-CLIPADJ	Adjustable Mounting Channel Bracket
SFLEX-CHAN-180-CON	180° Inline Connectors for SFLEX Channel



SENIK FLEX QUICK SET UP

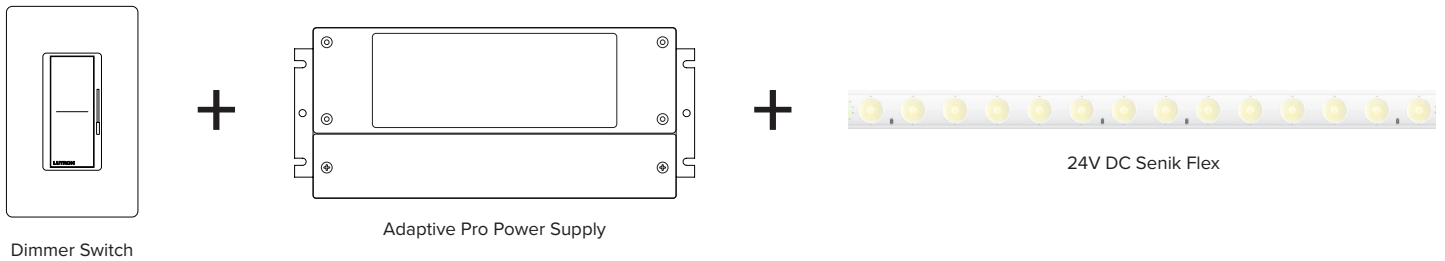

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPTPRO-DRJ-30-24	Adaptive Pro Series 30W	30W / 3W	100-277V AC	24V	Yes*	6.49"L x 3.6"W x 1.02"H
ADPTPRO-DRJ-60-24	Adaptive Pro Series 60W	60W / 6W	100-277V AC	24V	Yes*	7.44"L x 3.7"W x 1.73"H
ADPTPRO-DRJ-96-24	Adaptive Pro Series 96W	96W / 9.6W	100-277V AC	24V	Yes*	8.70"L x 3.7"W x 1.73"H
ADPTPRO-DRJ-192-24	Adaptive Pro Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V	Yes*	10.94"L x 4.3"W x 1.88"H
ADPTPRO-DRJ-288-24	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V	Yes*	11.92"L x 4.3"W x 1.88"H
ADPTPRO-DR-200-24	Adaptive Series 200W - Class P	200W / 20W	100-277V AC	24V	Yes*	10.07"L x 3.07"W x 1.85"H
ADPTPRO-DR-300-24	Adaptive Series 300W - Class P	300W / 30W	100-277V AC	24V	Yes*	10.86"L x 3.07"W x 1.85"H

*5-in-1 Dimming Capable: Phase (ELV/MLV/TRIAC) / 0-10V / 1-10V / 10V PWM / Potentiometer *

SENIK FLEX CUT INCREMENT GUIDE

Segment	Length (MM)	Length (Inches)	Length (Feet)
1	304.8	12	1
2	609.6	24	2
3	914.4	36	3
4	1219.2	48	4
5	1524	60	5
6	1828.8	72	6
7	2133.6	84	7
8	2438.4	96	8
9	2743.2	108	9
10	3048	120	10
11	3352.8	132	11
12	3657.6	144	12
13	3962.4	156	13
14	4267.2	168	14
15	4572	180	15
16	4876.8	192	16
17	5181.6	204	17
18	5486.4	216	18
19	5791.2	228	19
20	6096	240	20
21	6400.8	252	21
22	6705.6	264	22
23	7010.4	276	23
24	7315.2	288	24
25	7620	300	25
26	7924.8	312	26
27	8229.6	324	27
28	8534.4	336	28
29	8839.2	348	29
30	9144	360	30
31	9448.8	372	31
32	9753.6	384	32
33	10058.4	396	33



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary.

LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.