

# LEDVANCE LUMINAIRES LINEAR SLOT

## LEDVANCE LUMINAIRE SPECIFICATION DATA

Catalog #	Comments
Project	
Type	
Prepared by	

### PERFORMANCE CLASS™



### APPLICATION

The LEDVANCE Linear Slot offers a modern and sophisticated design for ambient lighting applications. Choose between a variety of mounting options and connectors to deliver the desired aesthetic in the space. The luminaire also allows for flexibility in the amount of direct or indirect lighting, and CCT and wattage selectability to further allow customization for each unique application.

### BENEFITS & FEATURES

- CCT selectable to allow for customizable light: 2700K/3000K/3500K/4000K/5000K
- Wattage selectable: 10/15/20W | 20/30/40W | 40/60/80W
- Three different finished color options: white, black and silver
- Offered in both direct + indirect light or direct light; for direct/indirect light, choose between five light levels
- Linkable with a variety of connector shapes
- Sleek and modern design
- Up to 130 LPW
- CRI >90
- Offered in 2ft, 4ft and 8ft



## ELECTRICAL

- 120-347 V<sub>AC</sub>
- Power Factor >90%
- THD <20%
- 0-10V dimmable

## OPERATING TEMPERATURE

- -4°F to +122°F  
(-20°C to +50°C)

## RATED LIFE

- 50,000 hours (L<sub>70</sub>)

## CERTIFICATIONS & LISTINGS

- cETLus
- RoHS
- FCC
- Damp Rated
- DLC Standard — Opal Lens
- DLC Premium — Louver Lens
- Title 24

## WARRANTY


- 5 year
- NLB Trusted Warranty Program

## INSTALLATION


- Simple suspension mounting kit is included with all products
- Simple basic ceiling mounting kit is included in all direct light only products
- Additional mounting accessories are sold separately
- Connect up to 600W

## PHYSICAL INFORMATION


LUMINAIRE	LENGTH (MM/IN)	WIDTH (MM/IN)	HEIGHT (MM/IN)
2ft	608 (23.9)	80 (3.16)	62 (2.4)
4ft	1206 (47.5)	80 (3.16)	62 (2.4)
8ft	2402 (94.6)	80 (3.16)	62 (2.4)

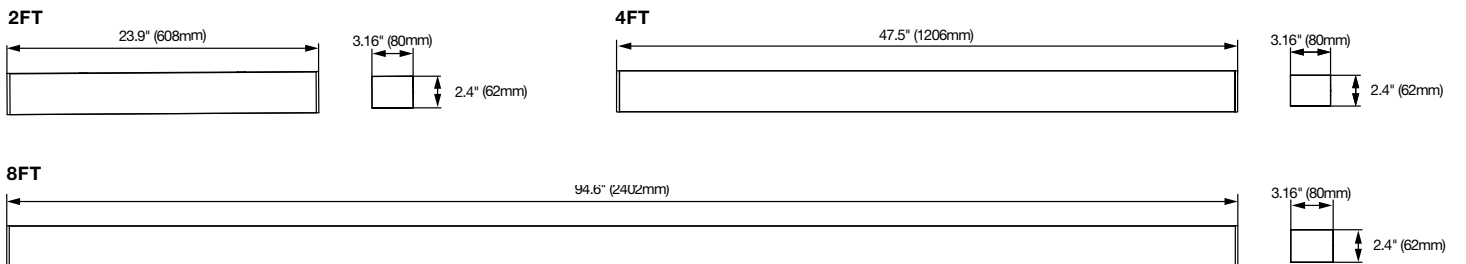


### L Connector




### T Connector

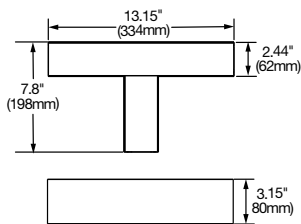


### V Connector

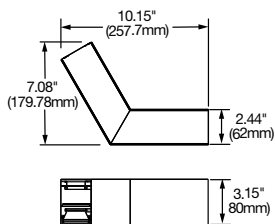

### X Connector

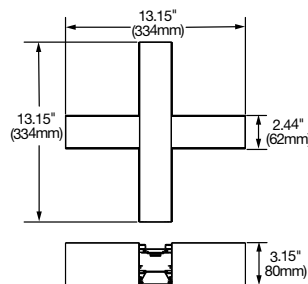

### Y Connector

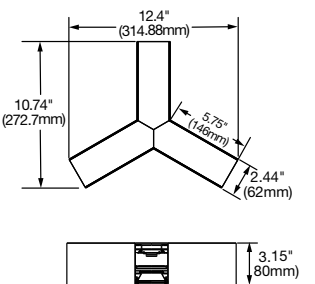

## ORDERING GUIDE

LINEAR OR LIN	XXX	P	SXX	UNH	D	9	SCX	XX	DX	XX	E
PRODUCT NAME	LENS	CLASS	WATTAGE	VOLTAGE	DIMMING	CRI	COLOR TEMP	LENGTH	DISTRIBUTION	FINISH	OPTIONS
LINEAR = Linear Architectural	LVR = Louver lens _ = Opal lens	P = Performance Class	S20 = 10/15/20W S40 = 20/30/40W S80 = 40/60/80W	UNH = 120-347V	D = 0-10V Dimming	9 = CRI >90	SC3 = Selectable Color: 2700/ 3000/3500/ 4000/5000K SC1 = Selectable Color: 2700/ 3000/3500/ 4000	24 = 2ft 48 = 4ft 96 = 8ft	D = Direct DI = Direct/ Indirect	WH = White BL = Black SV = Silver	E = Emergency Battery backup

## ORDERING INFORMATION

ITEM #	ORDERING ABBREVIATION	LENS	POWER (W)	INPUT VOLTAGE (V)	DIM. (V)	CRI	COLOR TEMP. (CCT)	LIGHT DISTR.	LUMENS	LENGTH	LPW	FINISH	MTO/PTO	DLC	OPTIONS
66688	LINEARPS20UNHD9SC324DWH	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	1150/1725/2300	2ft	110	White	-	Std	-
66689	LINEARPS20UNHD9SC324DIWH	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	1150/1725/2300	2ft	110	White	-	Std	-
66692	LINEARPS40UNHD9SC348DWH	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2400/3600/4800	4ft	110	White	-	Std	-
66693	LINEARPS40UNHD9SC348DIWH	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2400/3600/4800	4ft	110	White	-	Std	-
66696	LINEARPS80UNHD9SC396DWH	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	4800/7200/9600	8ft	110	White	-	Std	-
66697	LINEARPS80UNHD9SC396DIWH	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	4800/7200/9600	8ft	110	White	-	Std	-
66712	LINEARPS20UNHD9SC324DBL	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	1150/1725/2300	2ft	110	Black	-	Std	-
66713	LINEARPS20UNHD9SC324DIBL	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	1150/1725/2300	2ft	110	Black	-	Std	-
66716	LINEARPS40UNHD9SC348DBL	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2400/3600/4800	4ft	110	Black	-	Std	-
66717	LINEARPS40UNHD9SC348DIBL	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2400/3600/4800	4ft	110	Black	-	Std	-
66720	LINEARPS80UNHD9SC396DBL	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	4800/7200/9600	8ft	110	Black	-	Std	-
66721	LINEARPS80UNHD9SC396DIBL	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	4800/7200/9600	8ft	110	Black	-	Std	-
66690	LINLVRPS20UNHD9SC324DWH	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	1300/1950/2600	2ft	130	White	MTO	Prm	-
66691	LINLVRPS20UNHD9SC324DIWH	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	1300/1950/2600	2ft	130	White	MTO	Prm	-
66694	LINLVRPS40UNHD9SC348DWH	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2600/3900/5200	4ft	130	White	MTO	Prm	-
66695	LINLVRPS40UNHD9SC348DIWH	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2600/3900/5200	4ft	130	White	MTO	Prm	-
66698	LINLVRPS80UNHD9SC396DWH	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	5200/7800/10400	8ft	130	White	MTO	Prm	-
66699	LINLVRPS80UNHD9SC396DIWH	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	5200/7800/10400	8ft	130	White	MTO	Prm	-
66714	LINLVRPS20UNHD9SC324DBL	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	1300/1950/2600	2ft	130	Black	MTO	Prm	-
66715	LINLVRPS20UNHD9SC324DIBL	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	1300/1950/2600	2ft	130	Black	MTO	Prm	-
66718	LINLVRPS40UNHD9SC348DBL	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2600/3900/5200	4ft	130	Black	MTO	Prm	-
66719	LINLVRPS40UNHD9SC348DIBL	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2600/3900/5200	4ft	130	Black	MTO	Prm	-

**Notes:** For direct luminaires, mounting options include Surface/Suspended/Wall/Recessed/T-Grid.  
For direct/indirect luminaires, mounting options include Suspended/Wall/T-Grid. Additional accessories required for some installations.  
\*Items are also Title 24 Compliant

## ORDERING INFORMATION (CONTINUED)

ITEM #	ORDERING ABBREVIATION	LENS	POWER (W)	INPUT VOLTAGE (V)	DIM. (M)	CRI	COLOR TEMP. (CCT)	LIGHT DISTR.	LUMENS	LENGTH	LPW	FINISH	MTO/PTO	DLC	OPTIONS
66722	LINLVRPS80UNHD9SC396DBL	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	5200/7800/10400	8ft	130	Black	MTO	Prm	-
66723	LINLVRPS80UNHD9SC396DIBL	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	5200/7800/10400	8ft	130	Black	MTO	Prm	-
66916	LINEARPS40UNHD9SC348DBLE	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2400/3600/4800	4ft	110	Black	MTO	Std	EMBB
66917	LINEARPS40UNHD9SC348DIBLE	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2400/3600/4800	4ft	110	Black	MTO	Std	EMBB
66918	LINLVRPS40UNHD9SC348DBLE	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2600/3900/5200	4ft	130	Black	MTO	Prm	EMBB
66919	LINLVRPS40UNHD9SC348DIBLE	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2600/3900/5200	4ft	130	Black	MTO	Prm	EMBB
66920	LINEARPS80UNHD9SC396DBLE	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	4800/7200/9600	8ft	110	Black	MTO	Std	EMBB
66921	LINEARPS80UNHD9SC396DIBLE	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	4800/7200/9600	8ft	110	Black	MTO	Std	EMBB
66922	LINLVRPS80UNHD9SC396DBLE	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	5200/7800/10400	8ft	130	Black	MTO	Prm	EMBB
66923	LINLVRPS80UNHD9SC396DIBLE	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	5200/7800/10400	8ft	130	Black	MTO	Prm	EMBB
66924	LINEARPS40UNHD9SC348DWHE	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2400/3600/4800	4ft	110	White	MTO	Std	EMBB
66925	LINEARPS40UNHD9SC348DIWHE	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2400/3600/4800	4ft	110	White	MTO	Std	EMBB
66926	LINLVRPS40UNHD9SC348DWHE	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2600/3900/5200	4ft	130	White	MTO	Prm	EMBB
66927	LINLVRPS40UNHD9SC348DIWHE	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2600/3900/5200	4ft	130	White	MTO	Prm	EMBB
66928	LINEARPS80UNHD9SC396DWHE	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	4800/7200/9600	8ft	110	White	MTO	Std	EMBB
66929	LINEARPS80UNHD9SC396DIWHE	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	4800/7200/9600	8ft	110	White	MTO	Std	EMBB
66930	LINLVRPS80UNHD9SC396DWHE	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	5200/7800/10400	8ft	130	White	MTO	Prm	EMBB
66931	LINLVRPS80UNHD9SC396DIWHE	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	5200/7800/10400	8ft	130	White	MTO	Prm	EMBB
67004*	LINEARPS20UNHD9SC1724DWH	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct	1150/1725/2300	2ft	110	White	PTO	Std	-
67005*	LINEARPS20UNHD9SC1724DIWH	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	1150/1725/2300	2ft	110	White	PTO	Std	-
67006*	LINLVRPS20UNHD9SC1724DWH	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct	1300/1950/2600	2ft	130	White	PTO	Prm	-
67007*	LINLVRPS20UNHD9SC1724DIWH	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	1300/1950/2600	2ft	130	White	PTO	Prm	-
67008*	LINEARPS40UNHD9SC1748DWH	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct	2400/3600/4800	4ft	110	White	PTO	Std	-
67009*	LINEARPS40UNHD9SC1748DIWH	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	2400/3600/4800	4ft	110	White	PTO	Std	-
67010*	LINLVRPS40UNHD9SC1748DWH	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct	2600/3900/5200	4ft	130	White	PTO	Prm	-
67011*	LINLVRPS40UNHD9SC1748DIWH	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	2600/3900/5200	4ft	130	White	PTO	Prm	-
67012*	LINEARPS80UNHD9SC1796DWH	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct	4800/7200/9600	8ft	110	White	PTO	Std	-
67013*	LINEARPS80UNHD9SC1796DIWH	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	4800/7200/9600	8ft	110	White	PTO	Std	-
67014*	LINLVRPS80UNHD9SC1796DWH	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct	5200/7800/10400	8ft	130	White	PTO	Prm	-
67015*	LINLVRPS80UNHD9SC1796DIWH	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	5200/7800/10400	8ft	130	White	PTO	Prm	-

**Notes:** For direct luminaires, mounting options include Surface/Suspended/Wall/Recessed/T-Grid.  
 For direct/indirect luminaires, mounting options include Suspended/Wall/T-Grid. Additional accessories required for some installations.  
 \*Items are also Title 24 Compliant

## ORDERING INFORMATION (CONTINUED)

ITEM #	ORDERING ABBREVIATION	LENS	POWER (W)	INPUT VOLTAGE (V)	DIM. (M)	CRI	COLOR TEMP. (CCT)	LIGHT DISTR.	LUMENS	LENGTH	LPW	FINISH	MTO/PTO	DLC	OPTIONS
67016*	LINEARPS20UNHD9SC1724DSV	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct	1150/1725/2300	2ft	110	Silver	PTO	Std	-
67017*	LINEARPS20UNHD9SC1724DISV	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	1150/1725/2300	2ft	110	Silver	PTO	Std	-
67018*	LINLVRPS20UNHD9SC1724DSV	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct	1300/1950/2600	2ft	130	Silver	PTO	Prm	-
67019*	LINLVRPS20UNHD9SC1724DISV	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	1300/1950/2600	2ft	130	Silver	PTO	Prm	-
67020*	LINEARPS40UNHD9SC1748DSV	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct	2400/3600/4800	4ft	110	Silver	PTO	Std	-
67021*	LINEARPS40UNHD9SC1748DISV	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	2400/3600/4800	4ft	110	Silver	PTO	Std	-
67022*	LINLVRPS40UNHD9SC1748DSV	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct	2600/3900/5200	4ft	130	Silver	PTO	Prm	-
67023*	LINLVRPS40UNHD9SC1748DISV	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	2600/3900/5200	4ft	130	Silver	PTO	Prm	-
67024*	LINEARPS80UNHD9SC1796DSV	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct	4800/7200/9600	8ft	110	Silver	PTO	Std	-
67025*	LINEARPS80UNHD9SC1796DISV	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	4800/7200/9600	8ft	110	Silver	PTO	Std	-
67026*	LINLVRPS80UNHD9SC1796DSV	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct	5200/7800/10400	8ft	130	Silver	PTO	Prm	-
67027*	LINLVRPS80UNHD9SC1796DISV	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	5200/7800/10400	8ft	130	Silver	PTO	Prm	-
67028*	LINEARPS20UNHD9SC1724DBL	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct	1150/1725/2300	2ft	110	Black	PTO	Std	-
67029*	LINEARPS20UNHD9SC1724DIBL	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	1150/1725/2300	2ft	110	Black	PTO	Std	-
67030*	LINLVRPS20UNHD9SC1724DBL	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct	1300/1950/2600	2ft	130	Black	PTO	Prm	-
67031*	LINLVRPS20UNHD9SC1724DIBL	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	1300/1950/2600	2ft	130	Black	PTO	Prm	-
67032*	LINEARPS40UNHD9SC1748DBL	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct	2400/3600/4800	4ft	110	Black	PTO	Std	-
67033*	LINEARPS40UNHD9SC1748DIBL	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	2400/3600/4800	4ft	110	Black	PTO	Std	-
67034*	LINLVRPS40UNHD9SC1748DBL	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct	2600/3900/5200	4ft	130	Black	PTO	Prm	-
67035*	LINLVRPS40UNHD9SC1748DIBL	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	2600/3900/5200	4ft	130	Black	PTO	Prm	-
67036*	LINEARPS80UNHD9SC1796DBL	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct	4800/7200/9600	8ft	110	Black	PTO	Std	-
67037*	LINEARPS80UNHD9SC1796DIBL	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	4800/7200/9600	8ft	110	Black	PTO	Std	-
67038*	LINLVRPS80UNHD9SC1796DBL	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct	5200/7800/10400	8ft	130	Black	PTO	Prm	-
67039*	LINLVRPS80UNHD9SC1796DIBL	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000	Direct/Indirect	5200/7800/10400	8ft	130	Black	PTO	Prm	-
66724	LINEARPS20UNHD9SC324DSV	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	1150/1725/2300	2ft	110	Silver	PTO	Std	-
66725	LINEARPS20UNHD9SC324DISV	Opal	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	1150/1725/2300	2ft	110	Silver	PTO	Std	-
66726	LINLVRPS20UNHD9SC324DSV	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	1300/1950/2600	2ft	130	Silver	PTO	Prm	-
66727	LINLVRPS20UNHD9SC324DISV	Louver	10/15/20	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	1300/1950/2600	2ft	130	Silver	PTO	Prm	-
66728	LINEARPS40UNHD9SC348DSV	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2400/3600/4800	4ft	110	Silver	PTO	Std	-
66729	LINEARPS40UNHD9SC348DISV	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2400/3600/4800	4ft	110	Silver	PTO	Std	-

**Notes:** For direct luminaires, mounting options include Surface/Suspended/Wall/Recessed/T-Grid.  
 For direct/indirect luminaires, mounting options include Suspended/Wall/T-Grid. Additional accessories required for some installations.  
 \*Items are also Title 24 Compliant

## ORDERING INFORMATION (CONTINUED)

ITEM #	ORDERING ABBREVIATION	LENS	POWER (W)	INPUT VOLTAGE (V)	DIM. (V)	CRI	COLOR TEMP. (CCT)	LIGHT DISTR.	LUMENS	LENGTH	LPW	FINISH	MTO/PTO	DLC	OPTIONS
66730	LINLVRPS40UNHD9SC348DSV	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2600/3900/5200	4ft	130	Silver	PTO	Prm	-
66731	LINLVRPS40UNHD9SC348DISV	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2600/3900/5200	4ft	130	Silver	PTO	Prm	-
66732	LINEARPS80UNHD9SC396DSV	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	4800/7200/9600	8ft	110	Silver	PTO	Std	-
66733	LINEARPS80UNHD9SC396DISV	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	4800/7200/9600	8ft	110	Silver	PTO	Std	-
66734	LINLVRPS80UNHD9SC396DSV	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	5200/7800/10400	8ft	130	Silver	PTO	Prm	-
66735	LINLVRPS80UNHD9SC396DISV	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	5200/7800/10400	8ft	130	Silver	PTO	Prm	-
66932	LINEARPS40UNHD9SC348DSVE	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2400/3600/4800	4ft	110	Silver	PTO	Std	EMBB
66933	LINEARPS40UNHD9SC348DISVE	Opal	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2400/3600/4800	4ft	110	Silver	PTO	Std	EMBB
66934	LINLVRPS40UNHD9SC348DSVE	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	2600/3900/5200	4ft	130	Silver	PTO	Prm	EMBB
66935	LINLVRPS40UNHD9SC348DISVE	Louver	20/30/40	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	2600/3900/5200	4ft	130	Silver	PTO	Prm	EMBB
66936	LINEARPS80UNHD9SC396DSVE	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	4800/7200/9600	8ft	110	Silver	PTO	Std	EMBB
66937	LINEARPS80UNHD9SC396DISVE	Opal	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	4800/7200/9600	8ft	110	Silver	PTO	Std	EMBB
66938	LINLVRPS80UNHD9SC396DSVE	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct	5200/7800/10400	8ft	130	Silver	PTO	Prm	EMBB
66939	LINLVRPS80UNHD9SC396DISVE	Louver	40/60/80	120-347	0-10	>90	2700/3000/3500/4000/5000	Direct/Indirect	5200/7800/10400	8ft	130	Silver	PTO	Prm	EMBB

**Notes:** For direct luminaires, mounting options include Surface/Suspended/Wall/Recessed/T-Grid.  
For direct/indirect luminaires, mounting options include Suspended/Wall/T-Grid. Additional accessories required for some installations.  
\*Items are also Title 24 Compliant

## ACCESSORIES (INCLUDED IN THE PACKAGING)

ITEM	ITEM DESCRIPTION
Basic Surface Mounting Kit	DIRECT luminaires only come with a simple surface mounting kit included in the box
Basic Suspended Ceiling Mount	ALL luminaires come with a simple suspended mounting kit included in the box. Cable length: 4.16ft (1270mm).

### BASIC SUSPENDED CEILING MOUNT

Included in all Luminaire Kits



### BASIC SURFACE MOUNTING KIT

Included in all Direct Light Only Kits



DOWNLOAD BROCHURE  
FOR ADDITIONAL  
ACCESSORY OPTIONS



## ACCESSORIES (SOLD SEPARATELY)

ITEM #	ORDERING ABBREVIATION	DESCRIPTION
<b>Connectors</b>		
66770	LINEARPL-CONNECTORWH 12/CS 1/SKU	L-Connector, White Finish (100% downlight)
66771	LINEARPL-CONNECTORBL 12/CS 1/SKU	L-Connector, Black Finish (100% downlight)
66772	LINEARPL-CONNECTORSV 12/CS 1/SKU	L-Connector, Silver Finish (100% downlight)
66773	LINEARPT-CONNECTORWH 6/CS 1/SKU	T-Connector, White Finish (100% downlight)
66774	LINEARPT-CONNECTORBL 6/CS 1/SKU	T-Connector, Black Finish (100% downlight)
66775	LINEARPT-CONNECTORSV 6/CS 1/SKU	T-Connector, Silver Finish (100% downlight)
66776	LINEARPX-CONNECTORWH 6/CS 1/SKU	X-Connector, White Finish (100% downlight)
66777	LINEARPX-CONNECTORBL 6/CS 1/SKU	X-Connector, Black Finish (100% downlight)
66778	LINEARPX-CONNECTORSV 6/CS 1/SKU	X-Connector, Silver Finish (100% downlight)
66779	LINEARPY-CONNECTORWH 6/CS 1/SKU	Y-Connector, White Finish (100% downlight)
66780	LINEARPY-CONNECTORBL 6/CS 1/SKU	Y-Connector, Black Finish (100% downlight)
66781	LINEARPY-CONNECTORSV 6/CS 1/SKU	Y-Connector, Silver Finish (100% downlight)
66782	LINEARPV-CONNECTORWH 12/CS 1/SKU	V-Connector, White Finish (100% downlight)
66783	LINEARPV-CONNECTORBL 12/CS 1/SKU	V-Connector, Black Finish (100% downlight)
66784	LINEARPV-CONNECTORSV 12/CS 1/SKU	V-Connector, Silver Finish (100% downlight)
<b>Lenses</b>		
66848	LINEARPLOUVERLENS24WH 12/CS 1/SKU	2ft Louver Lens, White
67248	LINEARPLOUVERLENS24BL 12/CS 1/SKU	2ft Louver Lens, Black
66849	LINEARPLOUVERLENS48WH 12/CS 1/SKU	4ft Louver Lens, White
67249	LINEARPLOUVERLENS48BL 12/CS 1/SKU	4ft Louver Lens, Black
66850	LINEARPLOUVERLENS96WH 9/CS 1/SKU	8ft Louver Lens, White
67250	LINEARPLOUVERLENS96BL 9/CS 1/SKU	8ft Louver Lens, Black
66851	LINEARPPRISMATICLENS24 90/CS 1/SKU	2ft Prismatic Lens
66852	LINEARPPRISMATICLENS48 90/CS 1/SKU	4ft Prismatic Lens
66853	LINEARPPRISMATICLENS96 60/CS 1/SKU	8ft Prismatic Lens
67104	LINEARPHONEYCOMBLENS24BL 90/CS 1/SKU	2ft Honeycomb Lens
67105	LINEARPHONEYCOMBLENS48BL 90/CS 1/SKU	4ft Honeycomb Lens
67106	LINEARPHONEYCOMBLENS96BL 60/CS 1/SKU	8ft Honeycomb Lens
67107	LINEARPBaffleLENS24BL 90/CS 1/SKU	2ft Baffle Lens
67108	LINEARPBaffleLENS48BL 90/CS 1/SKU	4ft Baffle Lens
67109	LINEARPBaffleLENS96BL 60/CS 1/SKU	8ft Baffle Lens

## ACCESSORIES (CONTINUED)

ITEM #	ORDERING ABBREVIATION	DESCRIPTION
<b>Mounting Kits</b>		
66859	LINEARPCANOPYPMKITCIRWH 20/CS 1/SKU	Drywall Compatible Power Feed Canopy Kit, White Circular Cover
66909	LINEARPCANOPYPMKITCIRBL 20/CS 1/SKU	Drywall Compatible Power Feed Canopy Kit, Black Circular Cover
66910	LINEARPCANOPYPMKITCIRSV 20/CS 1/SKU	Drywall Compatible Power Feed Canopy Kit, Silver Circular Cover
66911	LINEARPCANOPYPMKITSQRWH 20/CS 1/SKU	Drywall Compatible Power Feed Canopy Kit, White Square Cover
66912	LINEARPCANOPYPMKITSQRBL 20/CS 1/SKU	Drywall Compatible Power Feed Canopy Kit, Black Square Cover
66913	LINEARPCANOPYPMKITSQRSV 20/CS 1/SKU	Drywall Compatible Power Feed Canopy Kit, Silver Square Cover
67177	LINEARPCANOPYPMKITNPCIRWH	Drywall Compatible Non-Power Feed Canopy Kit, White Circular Cover
67178	LINEARPCANOPYPMKITNPCIRBL	Drywall Compatible Non-Power Feed Canopy Kit, Black Circular Cover
67179	LINEARPCANOPYPMKITNPCIRSV	Drywall Compatible Non-Power Feed Canopy Kit, Silver Circular Cover
67180	LINEARPCANOPYPMKITNPSQRWH	Drywall Compatible Non-Power Feed Canopy Kit, White Square Cover
67181	LINEARPCANOPYPMKITNPSQRBL	Drywall Compatible Non-Power Feed Canopy Kit, Black Square Cover
67182	LINEARPCANOPYPMKITNPSQRSV	Drywall Compatible Non-Power Feed Canopy Kit, Silver Square Cover
66858	LINEARPCANOPYPMKITGCIRWH 20/CS 1/SKU	T-Grid Compatible Canopy Kit, White Circular Cover, power and non-power feed
66904	LINEARPCANOPYPMKITGCIRBL 20/CS 1/SKU	T-Grid Compatible Canopy Kit, Black Circular Cover, power and non-power feed
66905	LINEARPCANOPYPMKITGCIRSV 20/CS 1/SKU	T-Grid Compatible Canopy Kit, Silver Circular Cover, power and non-power feed
66906	LINEARPCANOPYPMKITGSQRWH 20/CS 1/SKU	T-Grid Compatible Canopy Kit, White Square Cover, power and non-power feed
66907	LINEARPCANOPYPMKITGSQRBL 20/CS 1/SKU	T-Grid Compatible Canopy Kit, Black Square Cover, power and non-power feed
66908	LINEARPCANOPYPMKITGSQRSV 20/CS 1/SKU	T-Grid Compatible Canopy Kit, Silver Square Cover, power and non-power feed
66860	LINEARPWMKIT 40/CS 1/SKU	Wall Mounting Kit
66861*	LINEARPRWMKIT 15/CS 1/SKU	Rotatable Wall Mounting Kit
66862*	LINEARPCMKITG 40/CS 1/SKU	T-Grid Compatible Surface Mounting Kit
66863	LINEARPCMKIT 40/CS 1/SKU	Drywall/Concrete/Wooden Frame Compatible Surface Mounting Kit
67195	LINEARPCMKITP	Drywall/Concrete/Wooden Frame Compatible Surface Mounting Power Feed Kit
66865	LINEARPRMBKITG 48/CS 1/SKU	T-Grid Compatible Recessed Mounting Kit for Front End Mounting without flange
66866	LINEARPRMKITG24 20/CS 1/SKU	T-Grid Compatible Recessed Mounting Kit for Side Mounting without flange – for 2ft Luminaires
66867	LINEARPRMKITG48 20/CS 1/SKU	T-Grid Compatible Recessed Mounting Kit for Side Mounting without flange – for 4ft Luminaires
66868	LINEARPRMKITG96 20/CS 1/SKU	T-Grid Compatible Recessed Mounting Kit for Side Mounting without flange – for 8ft Luminaires
66869	LINEARPRMMUDINKIT24 15/CS 1/SKU	Recessed Mud-In Kit for Drywall – for 2ft Luminaires
66870	LINEARPRMMUDINKIT48 15/CS 1/SKU	Recessed Mud-In Kit for Drywall – for 4ft Luminaires
66871	LINEARPRMMUDINKIT96 15/CS 1/SKU	Recessed Mud-In Kit for Drywall – for 8ft Luminaires
67120	LINEARPRMTFKIT24 20/CS 1/SKU	Recessed Flange Kit for Drywall – for 2ft Luminaires
67121	LINEARPRMTFKIT48 12/CS 1/SKU	Recessed Flange Kit for Drywall – for 4ft Luminaires
67122	LINEARPRMTFKIT96 6/CS 1/SKU	Recessed Flange Kit for Drywall – for 8ft Luminaires

\*Kit can be used as both powerfeed and non-powerfeed versions

## ACCESSORIES (CONTINUED)

ITEM #	ORDERING ABBREVIATION	DESCRIPTION
<b>Linking Bracket</b>		
66953	LINEARPLNKKIT 60/CS 1/SKU	Linking Bracket
<b>Control Options**</b>		
66854	PIRSENSORENDCAPWH 80/CS 1/SKU	Standalone PIR Sensor on End Cap, White
66855	PIRSENSORENDCAPBL 80/CS 1/SKU	Standalone PIR Sensor on End Cap, Black
66856	PIRSENSORENDCAPSV 80/CS 1/SKU	Standalone PIR Sensor on End Cap, Silver
67110	LUTRONSENSORENDCAPWH 80/CS 1/SKU	Lutron Vive Sensor on End Cap, White
67111	LUTRONSENSORENDCAPBL 80/CS 1/SKU	Lutron Vive Sensor on End Cap, Black
67112	LUTRONSENSORENDCAPSV 80/CS 1/SKU	Lutron Vive Sensor on End Cap, Silver
67113	LINKSENSORENDCAPWH 80/CS 1/SKU	LINK Sensor on End Cap, White
67114	LINKSENSORENDCAPBL 80/CS 1/SKU	LINK Sensor on End Cap, Black
67115	LINKSENSORENDCAPSV 80/CS 1/SKU	LINK Sensor on End Cap, Silver


\*Kit can be used as both powerfeed and non-powerfeed versions

\*\*Added through MTO orders


# PHOTOMETRIC INFORMATION

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM — 2FT


**2ft Baffle Lens — Direct**  
20W / 5000K

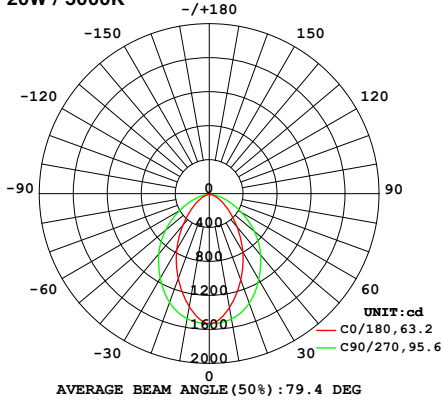


**2ft Baffle Lens — Direct/Indirect**  
20W / 5000K

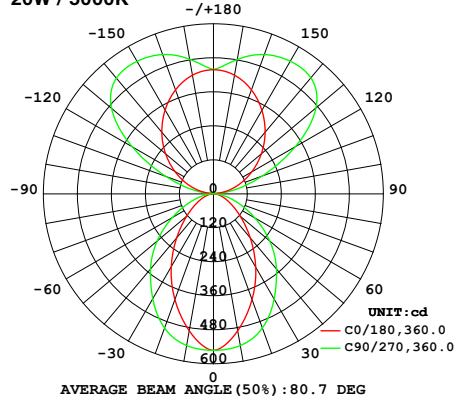


**2ft Honeycomb Lens — Direct**  
20W / 5000K

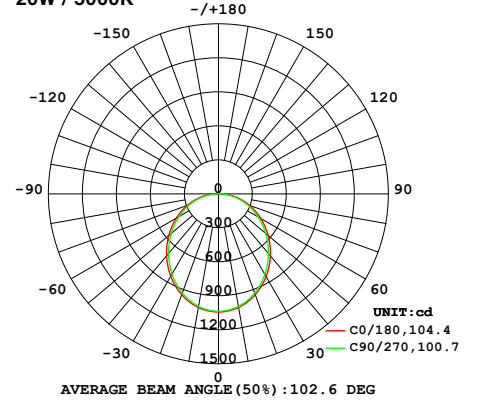


**2ft Honeycomb Lens — Direct/Indirect**  
20W / 5000K

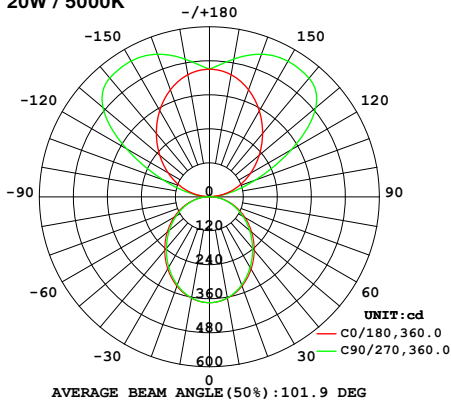


**2ft Opal Lens — Direct/Indirect**  
20W / 5000K

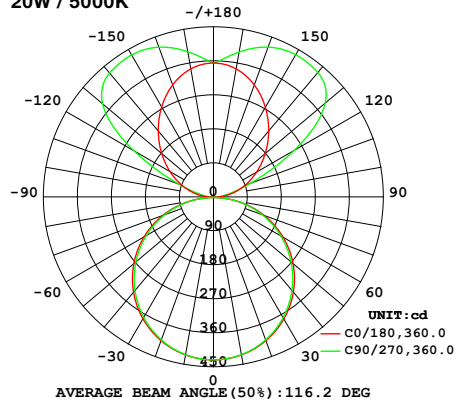


**2ft Opal Lens — Direct**  
20W / 5000K

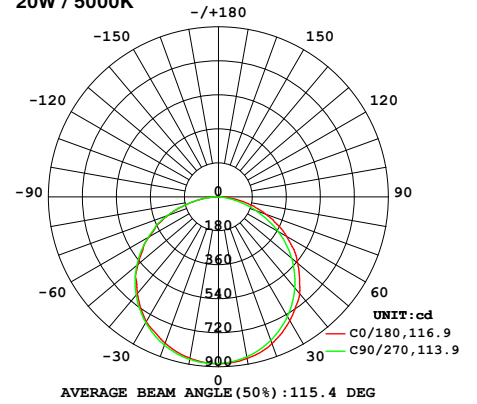

**2ft Louver Lens — Direct/Indirect**  
20W / 5000K

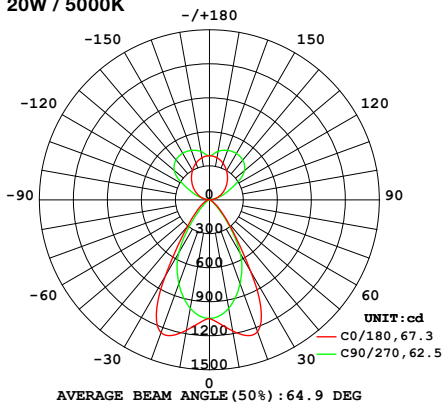


**2ft Louver Lens — Direct**  
20W / 5000K

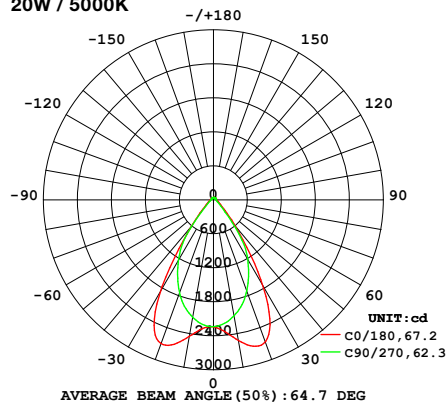


# PHOTOMETRIC INFORMATION

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM — 4FT


4ft Baffle Lens — Direct  
40W / 5000K

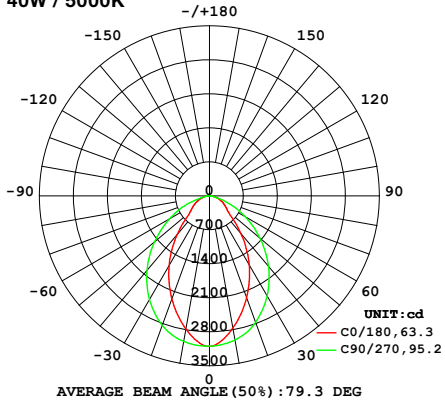


4ft Baffle Lens — Direct/Indirect  
40W / 5000K

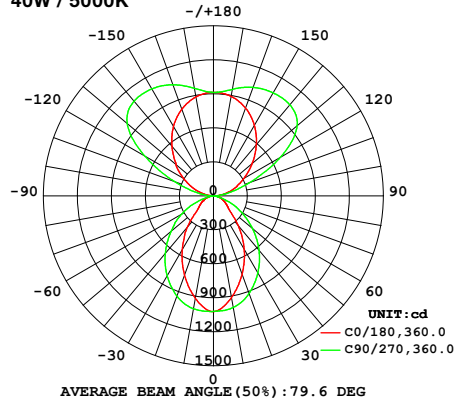


4ft Honeycomb Lens — Direct  
40W / 5000K

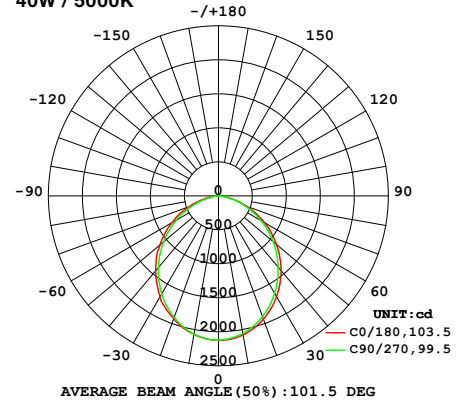


4ft Honeycomb Lens — Direct/Indirect  
40W / 5000K

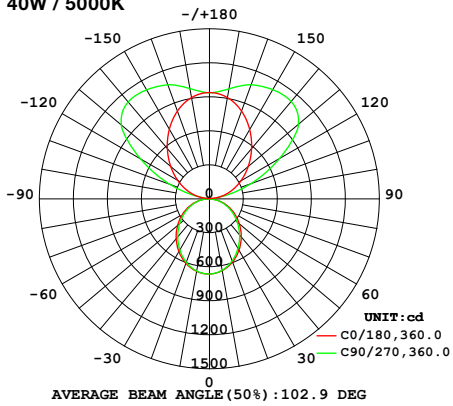


4ft Opal Lens — Direct/Indirect  
20W / 5000K

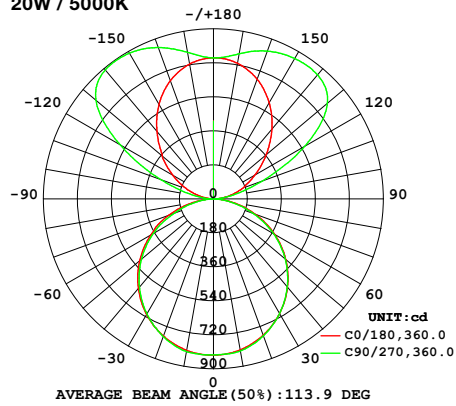


4ft Opal Lens — Direct  
20W / 5000K

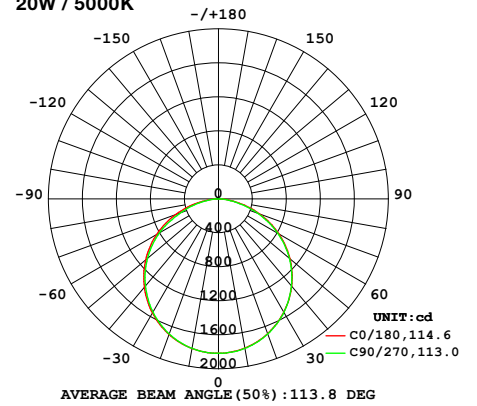

4ft Louver Lens — Direct/Indirect  
20W / 5000K

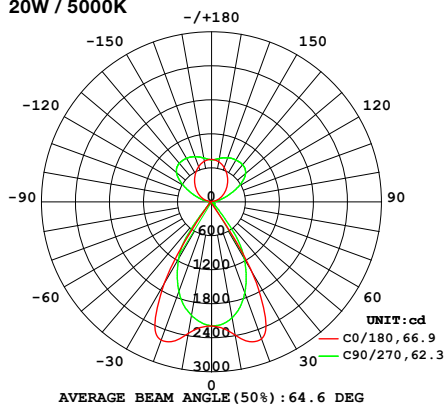


4ft Louver Lens — Direct  
20W / 5000K

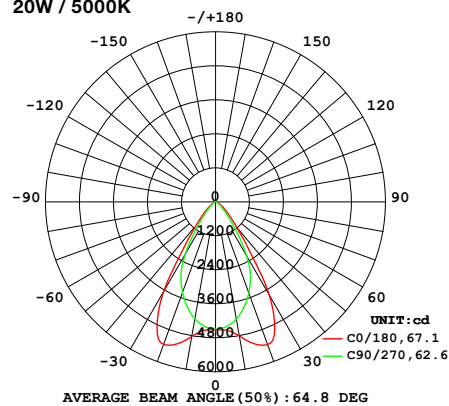


## SENSOR INFORMATION

### LEDVANCE LINK™ CONTROLLER DETECTION COVERAGE

Coverage Side View

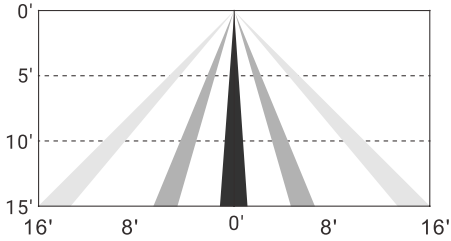

Coverage Top View


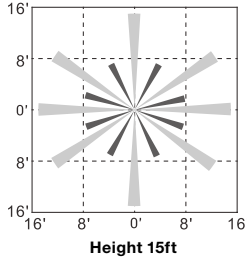


### STANDALONE PIR SENSOR

#### SENSOR PARAMETERS

Warming-up Period	About 10s
Control Device	Remote control HD06R (Purchase separately)
Detection Area	25%/50%/75%/100%
Hold Time	5s/30s/1min/3min/5min/10min/20min/30min
Daylight Threshold	2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/ 200Lux/250Lux/300Lux/350Lux/400Lux/Disable
Standby Dim Level	10%/20%/30%/50%
Standby Period	0s/10s/30s/1min/5min/10min/30min/60min/+
Daylight Harvesting	Function supported, please follow steps in "Performance" part to activate it.
Manually Dimming Play	Function supported, 10-100% in manual mode, 60%-100% in sensor mode.

### STANDALONE PIR SENSOR DETECTION COVERAGE

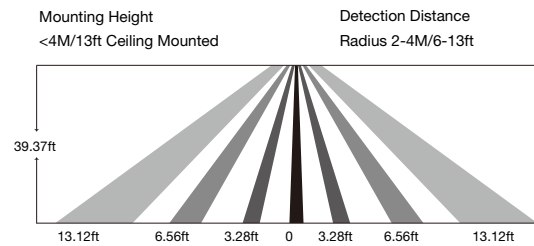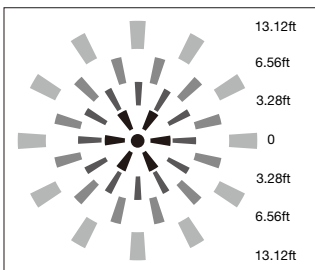

## SENSOR INFORMATION (CONTINUED)


### LUTRON VIVE SENSOR

#### DEFAULT SENSOR SETTINGS FOR DFCSJ-OEM-OCC\*

Occupancy Sensor Timeout	15 minutes
Occupancy Sensor Sensitivity	Medium
Mode	Occupancy detection (auto-ON, auto-OFF)
Occupied Light Level	100% (note this can be changed with a Pico remote and Radio Powr Savr sensor – see App Note #556 (048556) at <a href="http://www.lutron.com">www.lutron.com</a> ).
Daylight	Enabled. Daylight dims lights to OFF from low light level when sufficient ambient light is present for 15 minutes or more.

\*Adjustable ONLY via the Vive hub user interface unless otherwise noted.

### LUTRON VIVE SENSOR DETECTION COVERAGE

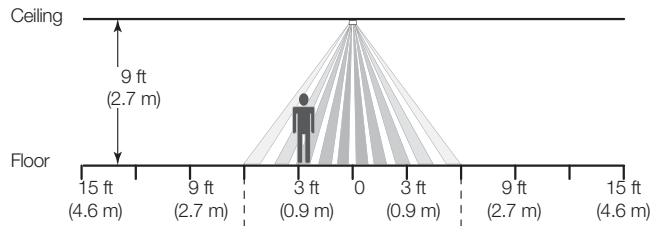

#### Major motion:

Movement of a person entering or passing through an area.

– 12 ft x 12 ft (144 ft<sup>2</sup>) (3.65 m x 3.65 m [13.3 m<sup>2</sup>])<sup>1,2</sup>

<sup>1</sup> Note that this is for the high sensitivity setting.

<sup>2</sup> Lights may turn on outside the major motion area.

#### Minor motion:

Movement of a person occupying an area and engaging in small activities (e.g., reaching for a telephone, turning the pages of a book, picking up a coffee cup, etc.)

– 12 ft x 12 ft (144 ft<sup>2</sup>) (3.65 m x 3.65 m [13.3 m<sup>2</sup>])

LEDVANCE LLC

181 Ballardvale Street, Suite 203

Wilmington, MA 01887 USA

Phone 1-800-LIGHTBULB (1-800-544-4828)

[www.ledvanceUS.com](http://www.ledvanceUS.com)

LEDVANCE is a registered trademark.  
All other trademarks are those of their respective owners.  
Specifications subject to change without notice.



SCAN TO FOLLOW US  
ON SOCIAL MEDIA