

SYLVANIA LAMPS

DUAL SELECT PAR LAMPS WITH OPTI-SELECT

OPTISELECT

SYLVANIA LAMP SPECIFICATION DATA

Catalog #	Comments
Project	
Type	
Prepared by	


SELECTABLE CCT

 2700K/3000K/3500K/
4000K/5000K

SELECTABLE WATTAGE

- PAR20: 4/6W
- PAR30: 6/8/10W
- PAR30LN: 6/8/10W
- PAR38: 9/12/15W

SELECTABLE LUMENS

- PAR20: 400/600
- PAR30: 600/800/1000
- PAR30LN: 600/800/1000
- PAR38: 800/1050/1300

OPTI SELECT

25° and 40° Beam Angles

DIMMABLE

Dimmable down to 10%

HIGH COLOR RENDERING

90+ CRI

HIGH EFFICACY

Up to 100 LPW

DESCRIPTION

SYLVANIA Dual Select PAR Lamps with OPTI-SELECT are offered in a PAR20, PAR30, PAR30LN & PAR38 configuration. These all-in-one energy efficient lamps have two beam angles (25° and 40°), 5-CCT and 3-wattage settings in a single lamp. Designed for high-quality lighting, they last up to 15,000 hours, are dimmable at any level, and deliver a 90+ CRI for excellent color rendering.

APPLICATION

- General lighting
- Residential interiors
- Retail outlets
- Campus
- Outdoor lighting
- Museums, exhibitions
- Exterior entryways
- Hotel/Motel

CERTIFICATIONS & LISTINGS

- ETLus listed to UL1598 Standards
- RoHS Compliant
- FCC Compliant
- Damp Location rated (PAR20, PAR30, PAR30LN)
- Wet Location (PAR38)
- Title 20

AMBIENT OPERATING TEMPERATURE

- -4°F to +104°F (-20°C to +40°C)

ELECTRICAL

- Input Voltage: 120V
- TRIAC Dimming
- Forward Phase Dimming

RATED LIFE

- 15,000 hours (L₇₀) @ 77°F/25°C

WARRANTY

- 3-Year Limited Warranty



ORDERING GUIDE


LED	S	XX	PARXXXX	DIM	9	SC3	ADJ	RP
LED	LUMENS	MAX. WATTAGE	LAMP TYPE	DIMMING	CRI	CCT	BEAM	RP
LED	Selectable	6 = 6W 10 = 10W 15 = 15W	PAR20 PAR30 PAR30LN PAR38	Dimmable	9 = 90+	SC3 = 5CCT Selectable 2700/3000/3500/4000/5000K	ADJ = Adjustable Beam angle 25° and 40°	RP = Retail 1PK

ORDERING INFORMATION

ITEM #	ORDERING ABBREVIATION	WATTAGE (W)	BASE TYPE	REPLACES	INPUT VOLTAGE (V)	AVERAGE LIFETIME	CCT (K)	TYPICAL LUMENS (LM)	CRI	POWER FACTOR	CASE QTY	FINISH
45379	LEDS6PAR20DIM9SC3ADJRP	4/6	E26 Medium	50/60	120	15,000	2700/3000/3500/4000/5000	400/600	≥90	>0.9	6	Plastic
45380	LEDS10PAR30DIM9SC3ADJRP	6/8/10	E26 Medium	50/75/90	120	15,000	2700/3000/3500/4000/5000	600/800/1100	≥90	>0.9	6	Plastic
45381	LEDS10PAR30LNDIM9SC3ADJRP	6/8/10	E26 Medium	50/75/90	120	15,000	2700/3000/3500/4000/5000	600/800/1100	≥90	>0.9	6	Plastic
45382	LEDS15PAR38DIM9SC3ADJRP	9/12/15	E26 Medium	75/90/120	120	15,000	2700/3000/3500/4000/5000	800/1050/1300	≥90	>0.9	6	Plastic

PHYSICAL INFORMATION

DESCRIPTION	DIAMETER (A)	HEIGHT (B)	WEIGHT
LEDS6PAR20DIM9SC3ADJRP	2.55in (65mm)	3.30in (84mm)	0.13lb (59g)
LEDS10PAR30DIM9SC3ADJRP	3.75in (95.5mm)	3.62in (92mm)	0.25lb (112g)
LEDS10PAR30LNDIM9SC3ADJRP	3.75in (95.5mm)	4.64in (118mm)	0.26lb (119g)
LEDS15PAR38DIM9SC3ADJRP	4.85in (123.4mm)	5.23in (133mm)	0.4lb (180g)

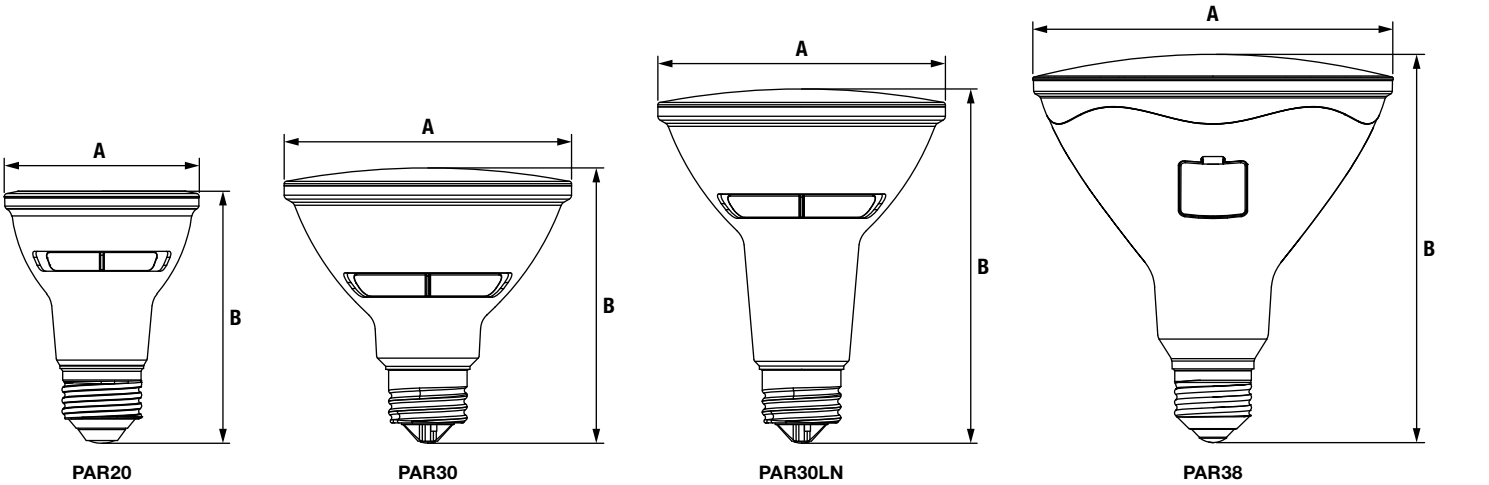

DIMMER COMPATIBILITY

MAKE	LEADING (L) OR TRAILING EDGE (T)	MODEL
PHASECUT DIMMERS		
Leviton SureSlide	L	6674
Lutron Maestro C-L	L	MACL-153M
Lutron Caseta	L	PD-6WCL
Legrand Radiant	L	RHCL453P
Lutron Diva	T	DVELV-300P
Lutron Maestro	T	MAELV-600

WATTAGE COMPARISON

TRADITIONAL SOURCE	TRADITIONAL SYSTEM WATTAGE	LED SYSTEM WATTAGE	ENERGY SAVINGS
HALOGEN	50/60W	4/6W	\$75.90/\$89.10
HALOGEN	50/75/90W	6/8/10W	\$72.6/\$110.50/\$132
HALOGEN	75/90/120W	9/12/15W	\$108.9/\$128.70/\$173.25



LEDVANCE UNITED STATES
HEADQUARTERS

LEDVANCE LLC.
181 Ballardvale Street, Suite 203
Wilmington, MA 01887
Phone: +1 978 753 5000

LEDVANCE.COM/EN-US

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.