

### PRODUCT DESCRIPTION

The Essentia® by Cree LED flat panel troffer transforms any space into a modern, visually comfortable environment with superior 90 CRI light quality. The remarkably thin 2.8" (70mm) depth of the flat panel easily accommodates narrow plenums or can be suspended for a more stylish look. The 2' x 4' flat panel delivers up to 5,000 lumens of highly efficacious 100 lumens per watt light with great color quality. The enhanced optics enable the flat panel troffer to meet spaces with low glare requirements and improve the customer experience by reducing lighting fatigue.

**Applications:** Office, retail, education, petroleum

### PRODUCT SPECIFICATIONS

#### OVERVIEW

- **Efficacy:** Up to 100 LPW
- **Initial Delivered Lumens:** 4,000 - 5,000 lumens
- **Input Power:** 40-50 Watts
- **CCT:** 3500K, 4000K, 5000K
- **CRI:** Minimum 90
- **Input Voltage:** 120-277 VAC
- **Lifetime:** 64,000 hours  $L_{70}$  at 25°C
- **Controls:** 0-10V dimming to 10%
- **Limited Warranty\*:** 5 years
- **Mounting:** Recessed\* or Suspended w/suspension mount kit accessory

#### ACCESSORIES

##### SUSPENSION KIT

FPAC-45-1

- Suspension Kit with canopy kit and cables

##### DRYWALL GRID ADAPTOR

DGA-24WHT

- Above ceiling access required

##### SURFACE MOUNT KIT

SMK-CR24

- Not for use with EB14 option

### ORDERING INFORMATION

Example: FP24-40L-35K-10V

FP24				10V		
PRODUCT	INITIAL DELIVERED LUMENS	CCT	CONTROL	VOLTAGE	OPTIONS	
FP24 Essentia® by Cree 2' x 4' Flat Panel	40L 40W, 4,000 lumens - 100 LPW 50L 50W, 5,000 lumens - 100 LPW	35K 3500K 40K 4000K 50K 5000K	10V 0-10V	Blank 120-277 Volt	EB14 Emergency Backup 1,400 lumens	

† See <http://lighting.cree.com/warranty> for warranty terms

\* Acceptable for use with standard 9/16 T-Bar or larger when installed per installation instructions. Consult factory for non-standard grid applications

NOTE: Price adder may apply depending on configuration

# FLAT PANEL

2' X 4'

## PRODUCT SPECIFICATIONS

### CONSTRUCTION & MATERIALS

- Solid aluminum frame provides strength and uniformity
- Ultra-thin 2.8" (70mm) luminaire height and design effectively target a broad range of plenum spaces and allow for easy installations
- Luminaire is post-painted with a soft matte white paint
- Compatible with standard 15/16" and 9/16" T-Bar ceilings<sup>1</sup>
- Compatible with drywall ceilings via accessory kit<sup>2</sup>
- Surface or cable mounting via accessory kits
- Frosted polycarbonate lens for non-pixelated appearance

### OPTICAL SYSTEM

- Edge-lit flat panel optics produce soft balanced low glare illumination
- Components work together to optimize distribution, balancing the delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces

## ELECTRICAL DATA

INITIAL DELIVERED LUMENS	SYSTEM WATTS 120-277V	TOTAL CURRENT			
		120V	208V	240V	277V
40L	40	0.41	0.23	0.21	0.18
50L	50	0.52	0.30	0.26	0.22

<sup>1</sup> Installation in 9/16" T-bar ceilings requires that fixture be aligned to grid aperture by securing four integral hanging clips to T-bar

<sup>2</sup> Above ceiling access required.

### ELECTRICAL SYSTEM

- Integral, high-efficiency driver
- **Power Factor:** > 0.9
- **Input Power:** Stays constant over life
- **Input Voltage:** 120-277V, 50/60Hz
- **Operating Temperature Range:** 0°C - + 35°C (32°F - + 95°F)
- **Total Harmonic Distortion:** < 20%
- **10V Source Current:** 0.10mA

### CONTROLS

- Continuous dimming to 10% with 0-10V DC control protocol
- For use with Class 2 dimming systems only. Reference [www.creelink.com/exLink.asp?70982140Z58R34I26620963](http://www.creelink.com/exLink.asp?70982140Z58R34I26620963) for recommended dimming controls and wiring diagrams

### REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- DLC qualified. Please refer to [www.designlights.org/QPL](http://www.designlights.org/QPL) for most current information
- RoHS compliant. Consult factory for additional details
- Suitable for damp locations
- Designed for indoor use
- **Ingress Protection:** IP40
- Type IC rated for direct contact with insulation
- UL924 (EB14 option)
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions

## APPLICATION REFERENCE


OPEN SPACE						
Spacing (ft)	Initial Delivered Lumens	Lumens	Wattage	LPW	w/ft <sup>2</sup>	Average fc
8x8	40L	4,000	40	100	0.60	58
	50L	5,000	50	100	0.75	73
8x10	40L	4,000	40	100	0.50	48
	50L	5,000	50	100	0.63	61
10x10	40L	4,000	40	100	0.40	39
	50L	5,000	50	100	0.50	48
10x12	40L	4,000	40	100	0.32	31
	50L	5,000	50	100	0.40	39

9' ceiling; 80/50/20 reflectances; 2.5' workplane, open room.  
LLF: 1.0 Initial Open Space: 50' x 40' x 9'

# FLAT PANEL

2' X 4'

## PHOTOMETRY

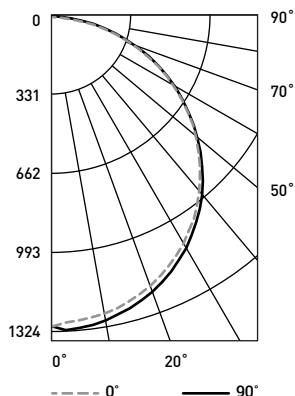

### FP24-40L-35K-10V BASED ON DTC REPORT TEST #: PL07123-004

Luminaire photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.

COEFFICIENTS OF UTILIZATION – ZONAL CAVITY METHOD				
RCC%:	80			
RW%:	70	50	30	10
RCR: 0	119	119	119	119
1	108	103	99	95
2	98	90	83	77
3	89	79	70	64
4	82	70	61	54
5	75	62	53	46
6	69	56	47	40
7	64	50	42	35
8	60	46	37	31
9	56	42	34	28
10	52	39	31	26

Effective Floor Cavity Reflectance: 20%

ZONAL LUMEN SUMMARY			
Zone	Lumens	%Lamp	Luminaire
0-30	1,020	N/A	26.4%
0-40	1,677	N/A	43.4%
0-60	2,993	N/A	77.4%
0-90	3,868	N/A	100%

Reference [www.cree.com/lighting](http://www.cree.com/lighting) for detailed photometric data

AVERAGE LUMINANCE TABLE (CD/M <sup>2</sup> )				
Vertical Angle	Horizontal Angle			
	0°	45°	90°	
45°	1,680	1,696	1,706	
55°	1,643	1,649	1,651	
65°	1,577	1,574	1,574	
75°	1,447	1,441	1,445	
85°	1,251	1,231	1,262	