

**MODEL** RC06-CC

**NAME** Versa

6in Modular Recessed

A versatile recessed lighting solution featuring customizable finishes, trims, lenses, and reflectors, with options for standard, sloped ceiling, and trimless installations, all with multi-voltage compatibility. 288 possibilities!

**PROJECT**
**TYPE**
**DATE**
**QTY**
**NOTES**

**QUICK SPECS**

<b>Size</b>	6"
<b>Watts (W)</b>	24/30/36
<b>Delivered lumens*</b>	Up to 3000
<b>CRI</b>	90
<b>Voltage (v)</b>	120/277/347
<b>Beam angle (deg)</b>	20/35/60
<b>UGR</b>	<25
<b>Lifespan (hrs)</b>	50 000
<b>FT rating</b>	FT6
<b>Binning</b>	3 SDCM
<b>LED model</b>	COB
<b>Color temperature</b>	2700,3000,3500,4000,5000K

**ELECTRICAL DETAILS**

<b>Environment</b>	Wet
<b>Location</b>	Indoor/Outdoor
<b>Operating temp. (° C)</b>	-28 to 48
<b>IP rating</b>	IP65
<b>Input voltage (V)</b>	120-347
<b>Output voltage (V)</b>	36
<b>Output current (mA)</b>	852
<b>Power factor (%)</b>	92
<b>Driver type</b>	Constant current
<b>Dimming</b>	ELV / 0-10v
<b>THD</b>	<20%
<b>Cut hole size (in)</b>	6"

**CONSTRUCTION**

<b>Housing material</b>	Aluminum
<b>Finish type</b>	Painted
<b>Lens material</b>	Acrylic
<b>Optic type</b>	Optical lens
<b>Certifications</b>	ETL, FCC, ICES, ES, JA8/T24 IC, ASTM E283-04

**ORDERING GUIDE**

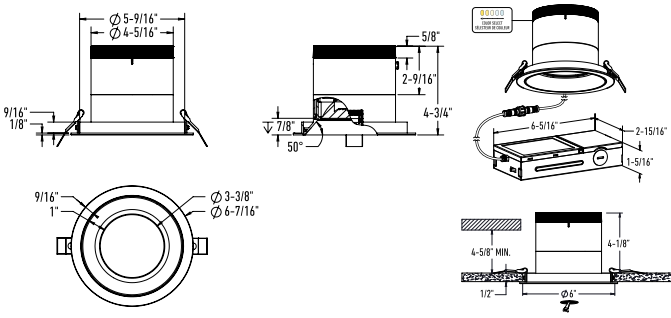
RC04-CC <i>Light module</i>	-	<i>Beam angle</i>	-	<i>Reflector type</i>	<i>Reflector finish</i>	-	<i>Trim style</i>
<b>UNIVERSAL DRIVER</b> 120-277-347V TRIAC / ELV 0-10v dimming		<b>20</b> 20° narrow beam <b>35</b> 35° medium beam <b>60</b> 60° wide beam		<b>RG</b> Regular ceiling <b>SL</b> Sloped ceiling <b>GMB</b> Gimbal	<b>AZ</b> Alzak <b>BK</b> Black <b>GD</b> Gold <b>WH</b> White		<b>TL</b> Round trimless <b>TBK</b> Round black trim <b>TGD</b> Round gold trim <b>TWH</b> Round white trim

<b>WW</b> Wall wash	<b>BK</b> Black
	<b>WH</b> White

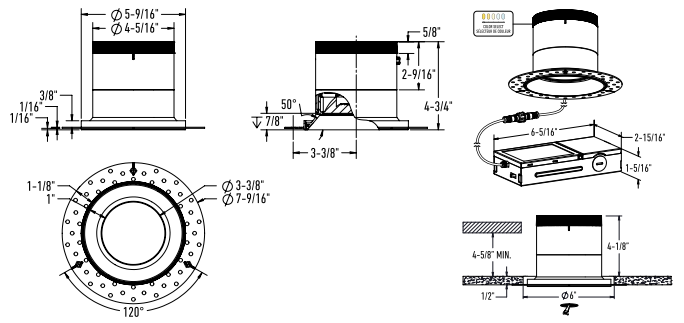
*The wall wash option integrates the reflector and trim into a single unit. Leave blank*

**DIMENSIONS**

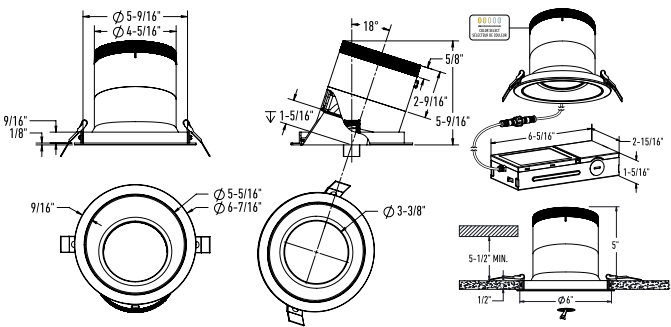
**RC06-XX-RGXX-TXX**



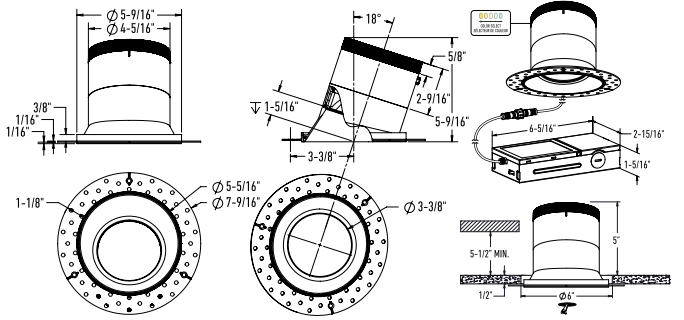
**RC06-XX-RGXX-TL**



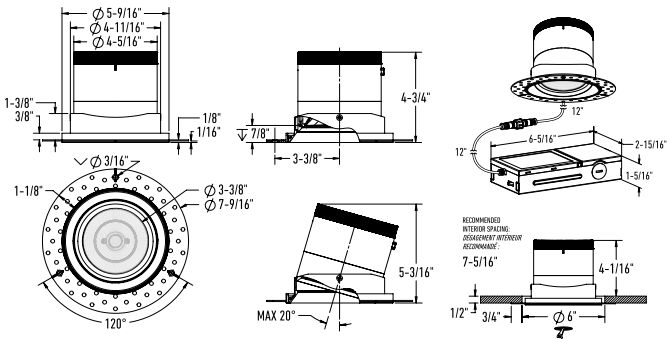
**RC06-XX-SLXX-TXX**



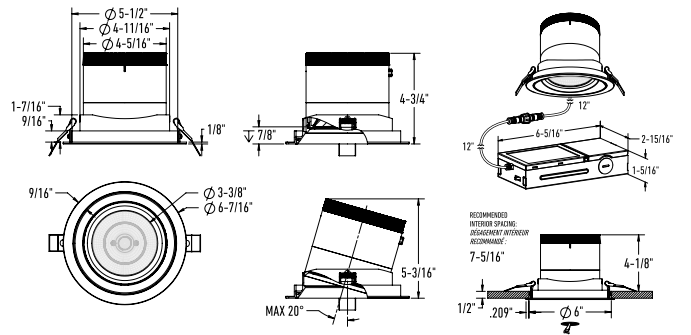
**RC06-XX-SLXX-TL**



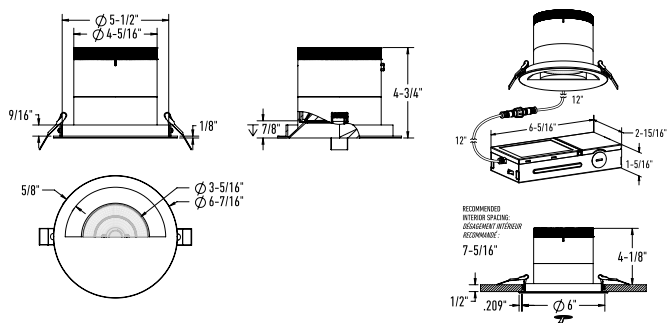
**RC06-CC-XX-GMBXX-TXX**



**RC06-CC-XX-GMBXX-TL**



**RC06-CC-XX-WWXX**

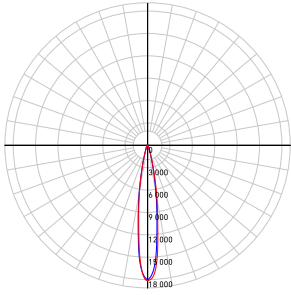


**LIGHT DISTRIBUTION**

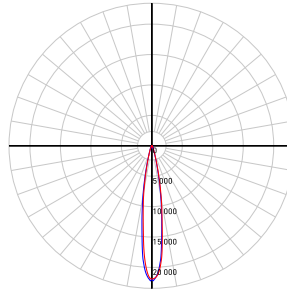
\*Lumen output measured at 3000k

**20° beam angle****24w**

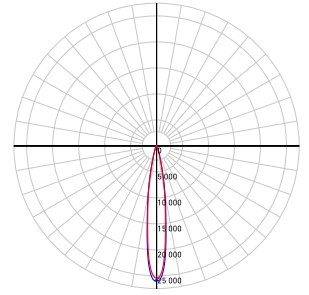
2241lm

**30w**

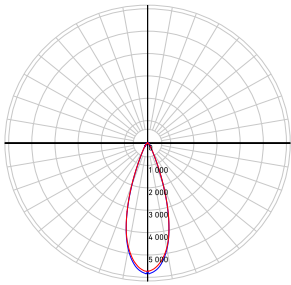
2756lm

**36w**

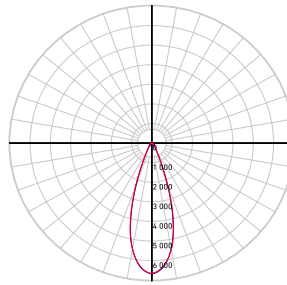
2948lm

**35° beam angle****24w**

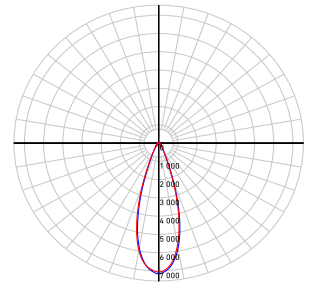
2247lm

**30w**

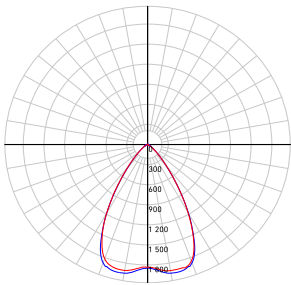
2594lm

**36w**

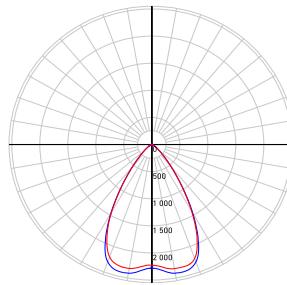
2801lm

**60° beam angle****24w**

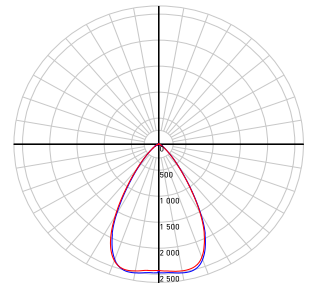
2231lm

**30w**

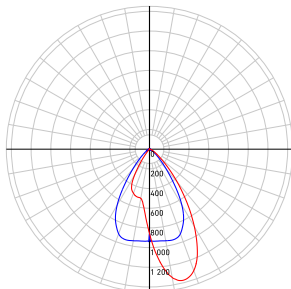
2715lm

**36w**

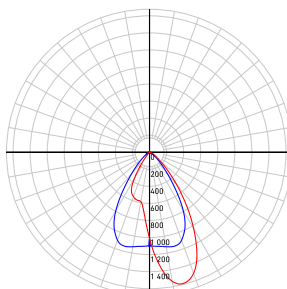
2948lm

**Wall wash (Ideal with 60° beam angle)****24w**

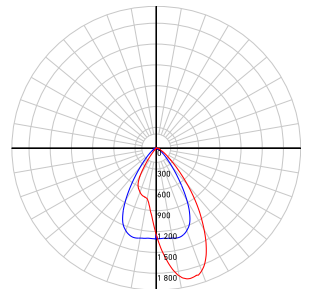
1135lm

**30w**

1310lm

**36w**

1704lm

**WHAT'S IN THE BOX**

- Complete LED recessed fixture
- Junction box
- 3x Push-in wire connectors
- 2x wire nuts
- Instruction sheet

**ACCESSORIES**[RFP-RC06](#)

Drilling plate

**ADAPTORS**[REC-CC-EXT8FT](#)

96" extension cord for recessed fixtures

[REC-CC-EXT20FT](#)

240" extension cord for recessed fixtures

