

# SPECIFICATION SHEET

## PRODUCT # : CL-342B-AB

• Step Lights

• Cast Brass

### Fixture Specifications:

**Housing:** Corrosion Resistant Cast Brass.

**Faceplate:** Diecast solid brass, fitted to housing with silicone "O" ring gasket.

**Finish:** **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process. Also available in **BR, GM,** and **SI** finishes

**Lens:** Frosted and heat resistant flat glass.

**Socket:** Top grade bi-pin socket.

**Lamp:** 12V T3, 20W Max. Available in LED (2W & 2.5W) or without lamp. See the Lamp Guide below for more information.


**Mounting:** Surface mounted, includes mounting plate.

**Wiring:** Fixture is prewired with a 18-2 SPT1-W direct burial cord. Wire connector available separately. Universal connector (**CX-839**), silicone filled wire nut (**CX-854**) or quick locking wire connector (**CX-LOC**) are available from Corona Lighting.


**Gasket:** Silicone "O" ring seals face plate to housing providing weather tight protection

**Electrical Notes:** A remote 12V transformer required, may be ordered to Corona Lighting separately. Operating voltage range for LED lamps the range is 8-21V.

**Warranty:** Limited lifetime warranty on fixture against manufacturer's defects.

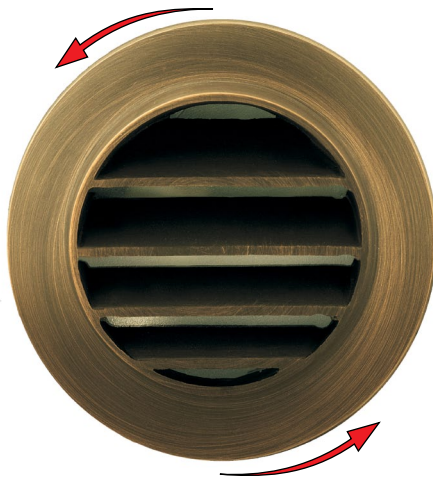

Twist To Lock Function  
Tool Free relamping.

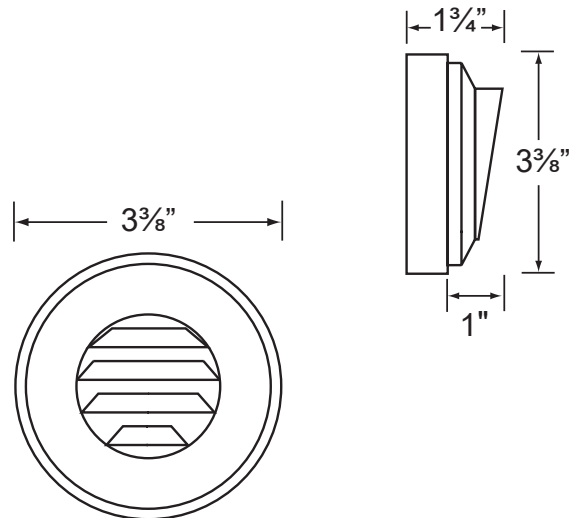

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM*	2	360°	170	2000K	25,000	20 Watt

\* AM- Amber color  
For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #: \_\_\_\_\_

TOTAL QUANTITY: \_\_\_\_\_

LAMP TYPE & WATTAGE: \_\_\_\_\_

TRANSFORMER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

• If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

Example: CL-342B-AB-L-EDT3-2W-3K

**CL** - **342B-AB** - **L-EDT3** - **2W-3K**

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

## PRODUCT # : CL-342B-AB

• Step Lights

• Cast Brass

### Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**
- CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**
- CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50 per Pack)

