

# SPECIFICATION SHEET

## PRODUCT # : CL-351

• Step

• Steel

### Fixture Specifications:

**Housing:** White powder coated steel mount box with S.C. bayonet socket

**Gasket:** Silicone gasket providing water-tight protection.

**Faceplate:** Stamped steel available in **PB**-Polish Brass Plated, **SI**-Silver Plated, polyester UV powder coated in **BK**-Black, **BZ**-Bronze, **WH**-White. (CU- Copper plated is discontinued)

**Wiring:** Fixture comes prewired with a 12 inch direct burial cord. Wire connector sold separately. Universal connector (**CX-839**), silicone filled wire nut (**CX-854**) or quick locking wire connector (**CX-LOC**) are available from Corona Lighting.

**Lens:** Tempered, and heat resistant glass. Lenses are sealed and secured to faceplates.

**Mounting:** Recessed box to mount into concrete, brick or Masonry. Outdoor use only.

**Socket:** Top grade fixed SC bayonet socket


**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 8V-21V.

**Lamp:** 12V, S.C. Bayonet, 18W max. Available in LED (2W & 2.5W) or without lamp. See the Lamp Guide below for more information.

**Warranty:** One year warranty on fixture housing and faceplate against manufacturer's defects.



BZ- Bronze finish shown

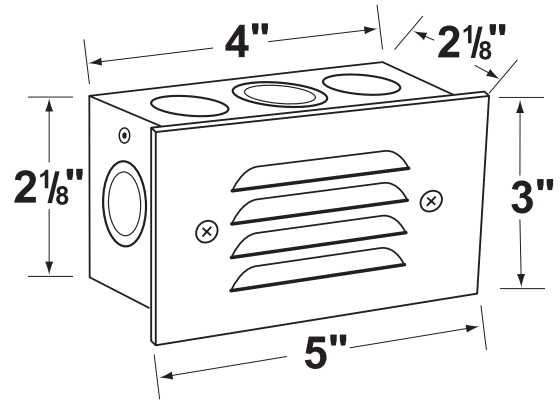

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

### JOB INFORMATION

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDBA-2W	2	360°	200	2700K	25,000	20 Watt
L-EDBA-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDBA-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDBA-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDBA-AM*	2	360°	170	2000K	25,000	20 Watt

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

\*AM- Amber color

For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

• If you are ordering LED lamps you should follow the format below:

• CL - **product #** - **color** - **lamp** - **wattage**  
CL - 351 - BZ - L-EDBA - 2W-3K

Example: CL-351-BZ-L-EDBA-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

# ACCESSORIES SHEET

## PRODUCT # : CL-351


• Step Light

• Steel

### Faceplates


CX-867 Aluminum 4 Louver Faceplate with Clear Acrylic Lens.

Finishes: **BK**- Black, **BZ**- Bronze, or **WH**- White

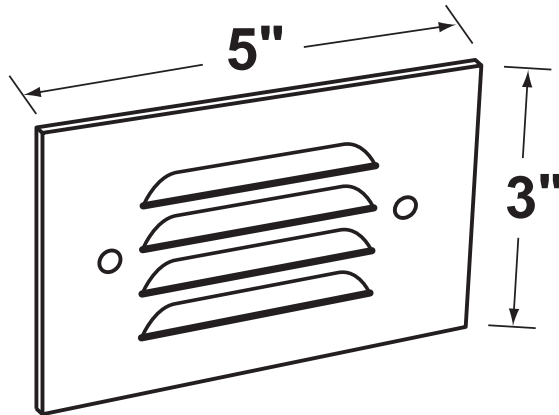

### Mount Box

CX-731 Steel Back Box **No Lamp**

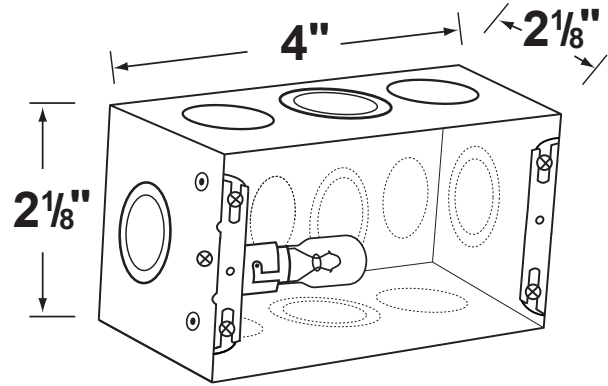

Lamp not included. Shown for demonstration.

### Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**
- CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**
- CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50 per Pack)

