



Project:	Type:
Prepared By:	Date:

**Technical Specifications**

**Performance**

**Product Type:**

New York City-Compliant Exit Sign

**Description:**

New York City-approved exit sign with a single face and red letters. 90 minutes of emergency battery backup.

**Input Wattage:**

5W @120V and 277V

**Electrical**

**Power Factor:**

≥0.9

**Input Voltage:**

Dual 120/277 Voltage

**Operating Frequency (Hz):**

60Hz

**Input Current @ 120V (mA):**

41mA

**Input Current @ 277V (mA):**

18mA

**Dual Voltage Circuit Operation:**

No

**Operating Temperature:**

68°F to 86°F (20°C to 30°C)

**Emergency Illumination:**

90 minutes

**Battery Backup:**

Yes

**Battery Type:**

Nickel Cadmium

**Battery Voltage:**

3.6V

**Recharge Time Required:**

24-hours

**Battery Operating Temperature:**

20°C to 30°C (68°F to 86°F)

**Storage Temperature:**

68°F to 86°F (20°C to 30°C)

**Storage Shelf Life:**

3 years before the initial charge. 5 years after initial charge.

**Self Diagnostics:**

No, manual test only

**Remote Test Switch:**

No

**Installation**

**Mounting Method:**

Back/Top/End

**Mounting Type:**

Wall/Ceiling Mount

**Cold Weather Rated:**

No

**Construction**

**Shape:**

Rectangle

**Housing Material:**

Steel Sheet

**Panel Material:**

Steel Sheet

**Panel Color:**

White

**Letter Color:**

Red

**Housing Color:**

White

## Technical Specifications (continued)

**Number of Faces:**

Universal Single/Double Face

**Arrow Direction:**

No Arrow

**Sign Format:**

Stencil

**Remote Capacity:**

No

**Compliance**

---

**Listings:**

UL924 Listed, NFPA 101 (current Life Safety Code),  
NEC and OSHA illumination standards

**Environment:**

Suitable for indoor use in dry environments

**IP Rating:**

Indoor

**Certification Model Number:**

NYXTEU3RWEM

**T20 Compliant:**

Can be used to conform with the requirements of  
California Title 20

**California Title 24 JA8 Compliant:**

Not applicable

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**City Compliance:**

New York City Approved

**FCC:**

Complies with Part 15 of the FCC Rules

**Other**


---

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Battery is prorated.

**Dimensions**

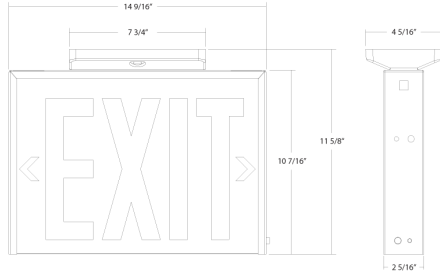

**Features**

- Double-face panel with red letters
- Steel housing
- New York City compliant
- Compliant with California Title 20

**Ordering Matrix**

Family	Face	Exit Sign Letter Color	Arrows	Housing	State	Battery Backup	Remote Capable
EXIT					NY	/E	
	1 = 1 Face Blank = Universal Faces	Blank = Red G = Green	LRA = Left Right Arrow RA = Right Arrow LA = Left Arrow DA = Double Arrow Blank = No Arrow	Blank = White Housing	Blank = Standard CH = Chicago NY = New York	Blank = No Battery Backup /E = Battery Backup	Blank = No Remote Capable R = Remote Capable