



UPC: 192552000192

Color: Frosted

Weight: 0.1 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

**Technical Specifications**

**Performance**

**Product Type:**

Decorative

**Input Wattage:**

5W

**Lumens:**

500lm

**L70 Lifespan:**

15,000-Hour LED lifespan based on IES LM-70 results

**Wattage Equivalency:**

60W

**LED Characteristics**

**Color Accuracy (CRI):**

90 CRI

**Color Temperature:**

2700K

**Beam Angle:**

360°

**Electrical**

**Power Factor:**

>0.7

**Dimmable:**

Yes, down to 10%

**Input Voltage:**

120V

**Operating Frequency:**

60 Hz

**Operating Temperature:**

-20°C to 40°C

**Construction**

**Bulb Shape:**

G25

**Enclosure Material:**

Glass

**Housing Finish:**

Frosted

**Installation**

**Base Type:**

E26 Edison

**Other**

**Technology EQ:**

Incandescent

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Compliance**

**Listings:**

UL Listed

**Environment:**

Wet / Enclosed

**T20 Compliant:**

Yes, Title 20 Tier 2

**RoHS:**

Mercury and UV free. RoHS-compliant components.

**FCC:**

Complies with Part 15B of the FCC Rules


**Minimum Compartment Size**

Length x Width x Height [in]	Lamp Quantity
10	1

**Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	6	0	0	0
PALLET	528	0	0	0

**Dimension**

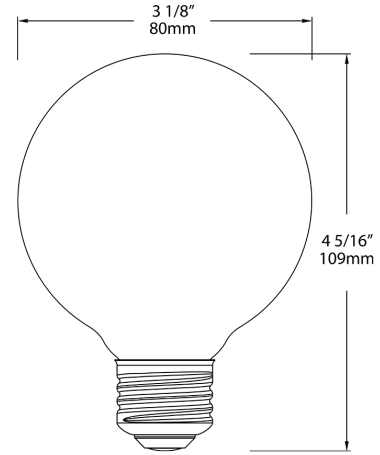

**Features**

- Replacement for conventional decorative lamps
- Filament LED construction gives a unique traditional look and feel for decorative and ambient applications
- Produces rich and vibrant colors, >90CRI
- Rated for use in enclosed and open fixtures in wet locations
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- Title 20 Compliant, ENERGY STAR Compliant, UL Listed
- Smooth uniform dimming down to 10% (check dimmer compatibility list)

**Ordering Matrix**

Family	Wattage	Base Type	CRI/Color Temp	Type	Finish
G25	5	E26	927	F	F
	3 = 3W 5 = 5W	E26 = E26	950 = 90 CRI, 5000K 940 = 90 CRI, 4000K 930 = 90 CRI, 3000K 927 = 90 CRI, 2700K	F = Filament	C = Clear F = Frosted