



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	40/30/20W
120V	0.30A/0.25A/0.17A	Color Temp	3500/4000/5000K
208V	0.17A/0.14A/0.10A	Color Accuracy	84-86 CRI
240V	0.15A/0.13A/0.08A	L70 Lifespan	100,000 Hours
277V	0.13A/0.11A/0.07A	Lumens	2,810-4,884 lm
Input Watts	19.7-35.4W	Efficacy	133.5-143.8 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
2' x 4': 36W/30W/20W (factory default 36W)
Color temperature selectable by 3500K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-SLH8X6

Electrical

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

6.86% at 120V, 12.76% at 277V

Power Factor:

99.7% at 120V, 97.2% at 277V

Surge Protection:

L-N: 1KV
L/N-PE: 2KV

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

36W: 10.6%
30W: 11%
20W: 19.6%

Construction

Cold Weather Starting:

Minimum starting temperature is 5°C (41°F)

Ambient Temperature:

Suitable for use in up to 40°C (104°F)

IC Rated:

Suitable for direct contact with insulation

Housing:

Polypropylene (PP)

Reflector:

Integral reflector (on the sides) with high reflectance finish, optimized for uniform distribution.

Lens:

Polycarbonate lens

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:

Recessed ceiling

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Technical Specifications (continued)

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Driver:

36W: Class 2, Constant Current, 120-277V, 50/60 Hz,
 120V: 0.30A, 208V: 0.17A, 240V: 0.15A, 277V: 0.13A
 30W: Class 2, Constant Current, 120-277V, 50/60 Hz,
 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A
 20W: Class 2, Constant Current, 120-277V, 50/60 Hz,
 120V: 0.17A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

Dimensions

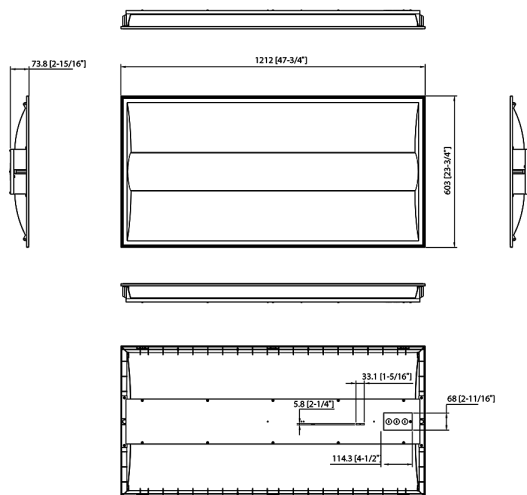

Features

- 0-10V Dimming, standard
- 100,000-hour LED lifespan
- 5-Year, no-compromise warranty

Ordering Matrix

Family	Size (Wattage)	Color Temp	Finish	Driver	Options
C-SWISH	2X4				/E
	2X2 = 2' x 2' (30/25/20W) 1X4 = 1' x 4' (30/25/20W) 2X4 = 2' x 4' (36/30/20W)	Blank = 3500/4000/5000K CCT Adjustable	Blank = White	Blank = 120-277V, 0-10V Dimming	Blank = No Option /E = Battery Backup /MVS = Microwave Occupancy Sensor /LCBS/MVS = Lightcloud Blue MVS Sensor /LC = Lightcloud /LC/E = Lightcloud w/Battery Backup /MVS/E = Microwave Occupancy Sensor w/Battery Backup /LCBS/MVS/E = Lightcloud Blue MVS Sensor w/Battery Backup