

# SPECIFICATION SHEET

## PRODUCT # : CL-130B-AB

• Down Light

• Cast Brass

### Fixture Specifications:

**Housing:** Corrosion resistant solid brass.  
*Shroud is adjustable and extendable.*

**Finish:** **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process. Fixture also available in **GM- Gun Metal.**

**Lens:** Clear and heat resistant tempered flat glass.

**Socket:** Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place

**Lamp:** 12V MR-8, 2.5W max.  
Available in 2.5W LED or without lamp.  
See lamp guide below for more information.

**Wiring:** Fixture is prewired with a 5-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Universal connector (**CX-839**), gel filled wire nut (**CX-854**) or quick locking wire connector (**CX-LOC**) is available from Corona Lighting.


**Gasket:** Silicone gasket for water tight sealing.

**Knuckle:** Adjustable cast brass knuckle with thumb screw.

**Mounting:** Brass round Canopy with 1/2" NPT threaded female hub. CX-719B Brass mounting bracket is also available.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 10V-30V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

**Warranty:** Limited lifetime warranty on fixture housing against manufacturer's defects.

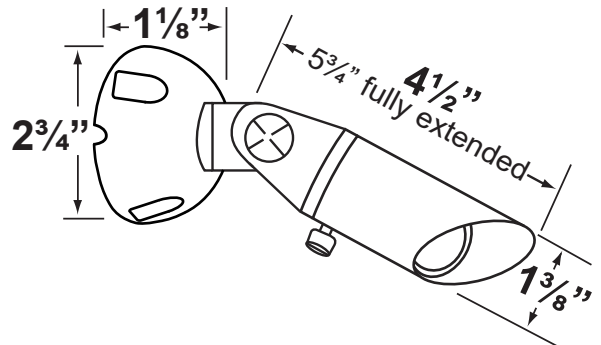

#### ACCESSORY



#### Mounting Bracket

CX-719B-AB  
AB- Antique Bronze

*Fixture is also available with CX-719B-AB. Price remains the same as listed.*

#### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.
L-ED8-2.5W	2.5	38° FL	180	2700K

#### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**  
**CL - 130B-AB - L-ED8 - 2.5W**

Example: CL-130B-AB-L-ED8-2.5W

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

## PRODUCT # :CL-130B-AB

Down Lights

• Cast Brass

### Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**
- CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**
- CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50 per Pack)

