



Color: White

Weight: 3.0 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

Edge-lit Exit Sign

Description:

Ultra-economy, plastic, edge-lit exit sign with a single face, red letters, and 90 minutes of emergency battery backup.

Input Wattage:

4W @120V and 277V

Electrical

Power Factor:

≥0.9

Input Voltage:

Dual 120/277 Voltage

Operating Frequency (Hz):

60Hz

Input Current @ 120V (mA):

30mA

Input Current @ 277V (mA):

20mA

Dual Voltage Circuit Operation:

No

Operating Temperature:

32°F to 122°F (0°C to 50°C)

Emergency Illumination:

90 minutes

Battery Backup:

Yes

Battery Type:

Nickel Cadmium

Battery Voltage:

4.8V

Recharge Time Required:

24-hours

Battery Operating Temperature:

32°C to 122°C (0°F to 50°F)

Storage Temperature:

68°F to 86°F (20°C to 30°C)

Storage Shelf Life:

3 years before the initial charge. 5 years after initial charge.

Self Diagnostics:

No, manual test only

Remote Test Switch:

No

Installation

Mounting Method:

Back/Top/End

Mounting Type:

Wall/Ceiling Mount

Cold Weather Rated:

No

Construction

Shape:

Rectangle

Housing Material:

Thermoplastic

Panel Material:

Acrylic

Panel Color:

Clear

Letter Color:

Red

Housing Color:

White

Technical Specifications (continued)

Number of Faces:

Single Face

Arrow Direction:

No Arrow

Sign Format:

Edge-lit

Remote Capacity:

No

Compliance

Listings:

UL924 Listed, NFPA 101 (current Life Safety Code),
NEC and OSHA illumination standards

Environment:

Suitable for indoor use in dry and damp
environments

IP Rating:

Indoor

Certification Model Number:

PLELRXTEU1RCWEM

T20 Compliant:

Can be used to conform with the requirements of
California Title 20

California Title 24 JA8 Compliant:

Not applicable

California Energy Commission (CEC) Status:

Lawful for Sales in California

FCC:

Complies with Part 15 of the FCC Rules

Other


5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output,
driver performance and paint finish. RAB's warranty
is subject to all terms and conditions found at

rablighting.com/warranty.

Battery is prorated.

Dimensions

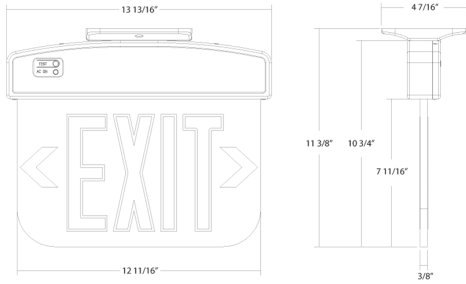

Features

- Single-face panel with red letters
- Modern edge-lit design
- Compliant with California Title 20

Ordering Matrix

Family	Face	Exit Sign Letter Color	Panel	Housing	Arrows	Self Testing	Battery Backup
EXITEDGE34	1		W				/E
	1 = 1 Face	Blank = Red G = Green	Blank = Clear Panel	W = White Housing	Blank = No Arrow	Blank = No Self Testing S = Self Testing	Blank = No Battery Backup /E = Battery Backup