

## Drums And Clouds

Flush-Mount Mounted • Damp Location Listed **PROGRESS LED**

### Description:

One-Light 10-13/16" LED Cloud Flush Mount

### Specifications:

- White Acrylic Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" recessed outlet box: 10.5 in W., 0.875 in ht., 10.5 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

### Performance:

Number of Modules	1
Input Power	20.2 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,350/66.8 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	36000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Max. Operating Temp	30°C
Warranty	5-year Limited Warranty
Labels	ETL Damp Location Listed
	Meets California Title 24 JA8-2016

# P730008-030-30



### Dimensions:

Diameter: 10-13/16 in  
Height: 4 in

White Acrylic Diffuser  
Width: 10-13/16 in  
Height: 3-9/16 in



## P730008-030-30

### Photometrics:

<b>ELECTRICAL DATA</b>	<b>P730008-030-30</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.171 A
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	


**P730008-030-30**  
 LED Light Engine: 3000 K 90 CRI  
 System Wattage: 20.2  
 Fixture delivered lumens: 1350  
 Fixture Efficacy: 66.8  
 Spacing Criteria: 1.26

#### CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	361	
5	359	34
15	347	98
25	323	149
35	289	181
45	247	191
55	203	182
65	159	158
75	120	127
85	85	93
90	69	
95	56	62
105	34	36
115	18	19
125	9	9
135	6	5
145	6	3
155	5	2
165	4	1
175	3	0
180	3	

#### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	281	20.8
0-40	461	34.2
0-60	834	61.8
0-90	1213	89.8
90-120	117	8.6
90-130	125	9.3
90-150	134	9.9
90-180	137	10.2
0-180	1350	100.0

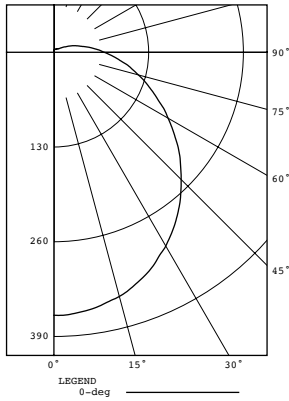

Test 18.00023 Test Date 01/08/18

# P730008-030-30

## Dimming Notes:

---

P730008-030-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls:

---

Lutron\_Diva DVCL-253P

Lutron\_Caseta Wireless

Lutron\_Toggler TGCL-153PH

Lutron\_Ariadni AYCL-153P

Lutron\_NTLV-600

Leviton\_SureSlide 6674

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.