



| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|-------------------------------|----------------|---------------------------|
| Type | Constant Current | Watts | 4/7/11/15/19W |
| 120V | 0.04A/0.06A/0.09A/0.13A/0.17A | Color Temp | 3500/4000/5000/5700/6500K |
| 208V | 0.02A/0.04A/0.05A/0.07A/0.10A | Color Accuracy | 83-86 CRI |
| 240V | 0.02A/0.03A/0.05A/0.06A/0.08A | L70 Lifespan | 100,000 Hours |
| 277V | 0.03A/0.04A/0.05A/0.06A/0.07A | Lumens | 548-2883 lm |
| Input Watts | 4.6-20.1W | Efficacy | 118.4-143.8 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
19/15/11/7/4W (factory default 19W)
Color temperature selectable by
3500/4000/5000/5700/6500K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-44HZ3Z(Direct Linear Ambient Luminaires)
DLC Product Code: S-4KW6HD (Stairwell and Passageway Luminaires)

LED Characteristics

LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Color Consistency:

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, Class II, 120-277V, 50/60 Hz:
19W: 120V: 0.18A, 208V: 0.11A, 240V: 0.09A, 277V: 0.08A
15W: 120V: 0.13A, 208V: 0.07A, 240V: 0.06A, 277V: 0.05A
11W: 120V: 0.09A, 208V: 0.05A, 240V: 0.05A, 277V: 0.04A
7W: 120V: 0.06A, 208V: 0.03A, 240V: 0.03A, 277V: 0.03A
4W: 120V: 0.03A, 208V: 0.02A, 240V: 0.02A, 277V: 0.02A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Aux Power Supply:

Yes

Dim to Off:

Yes

Surge Protection:

L-N 1 kV, L/N-G 2 kV

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

19W: 22.20%
15W: 30.60%
11W: 43.10%
7W: 67.50%
4W: 116.70%

Construction

Cold Weather Starting:

The minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature w/Battery Backup:

Suitable for use in up to 122°F (50°C)

Technical Specifications (continued)**Lens:**

Polycarbonate lens

Housing:

Galvanized steel (painting)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Installation**Mounting:**

Surface mounting standard. V-Hooks and Chain mounting available (ordered separately, SR VHOOK KIT).

Sensor Settings**Remote Control Accessory:**Adjust settings using remote control (catalog# MSR1). Only available with 0-10V dimming driver options. [Remote control available here.](#)**Operating Voltage:**DC Input: 10.5-15V
Current>50mA**Operating Temperature:**

Ta: -31° F (-35° C)* ~ +122° F(+50° C)

Sensor Warranty:

5-year sensor warranty

Sensitivity Setting:

25%/50%/75%/100%

Standby Period:

0s/10s/30s/1min/5min/10min/30min/60min/+∞

Daylight:

2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable

Hold Time:

5s/30s/1min/3min/5min/10min/20min/30min

Standby Dimming:

10%/20%/30%/50%

Detection Angle:

30° to 150° without glass cover

Detection Distance:


Radius 9.84-22.96ft(3-7m)

Mounting Height:

Max 49ft.(15m)

Other**5-Year Limited Warranty:**The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.**Accessories:**Suspended Mounting Kit: SR VHOOK KIT
Surface Mount Kit: SR JOIN KIT

Dimensions

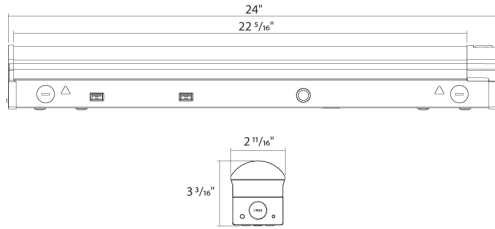

Features

- 50,000-Hour LED lifespan
- 120-277V standard
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

| Family | Size/Wattage | Mounting | Color Temp | Finish | Options |
|--------|--|-----------------------|--|---------------|---|
| SR | 2 | | | | /MVS/E |
| | 3 = 3ft (30/26/22/18/14W) 4L = 4ft (28/24/20/16/12W) 4 = 4ft (40/35/30/25/20W) 8 = 8ft (60/52/44/36/28W) 8H = 8ft (85/75/65/55/45W) 2 = 2ft (19/15/11/7/4W) | Blank = J-Box Adaptor | Blank = 3500/4000/5000/5700/6500K CCT Adjustable | Blank = White | /LCBS/MVS/E = Lightcloud Blue MVS Sensor w/Battery Back Up /LCBS/E = Lightcloud Blue PIR Sensor w/Battery Back Up /PIR/E = Passive Infrared Occupancy Sensor w/Battery Back Up /MVS/E = Microwave Occupancy Sensor w/Battery Back Up /LCBS/MVS = Lightcloud Blue w/MVS Sensor /LCBS = Lightcloud Blue w/PIR Sensor /PIR = Passive Infrared Occupancy Sensor /MVS = Microwave Occupancy Sensor /E = Battery Back Up Blank = No Option |