


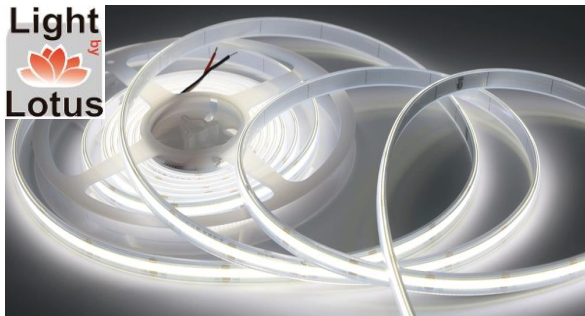

DESCRIPTION


Waterproof COB LED flexible strip 24V
 Seamless linear light - no diffused cover needed
 No hotspots and with CRI 90+ for vibrant colors
 Higher efficiency and more flexible than SMD LED strips
 Easy to install and low maintenance
 Wires on both ends
 Without double adhesive tape - sold separately

APPLICATIONS

Cove and decorative lighting, path and contour marking
 Outdoor, bathrooms, undercabinet and valance use
 Suitable for installation in the storage area of a clothes closet

SEALING CUTS REQUIREMENTS

Do not use acidic or ketoxime-based adhesives when sealing cuts.
 Such adhesives can damage or corrode the strip surface.
 Use only alcohol-based, neutral-cure sealant.
 LED strips may be cut only at designated cut marks.

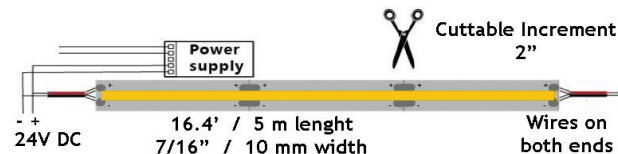

WARNING

LED tape gets hot. Mounting firmly and securely on smooth and thermo conductive surface such as metal or glass is critical for proper thermal management and long life. Not following these instructions voids the warranty



ORDERING GUIDE

3000K **LBL-COB-384-24V-10MM-30K-IP65**
 5000K **LBL-COB-384-24V-10MM-50K-IP65**

LBL-COB-384-24V-10MM-IP65

COB LED Strip 24V 3W/ft 16ft Waterproof IP65

Project:

Location:

Model # :

Qty:

Notes:

SPECIFICATION (tolerance +/- 10%)	
Applications	Undercabinet, Cove, Bathrooms, Valance, Decorative
Color Temperature (K)	3000 5000
Power	3 W/ft
Efficiency	100 lm/W
Light output	300 lm/ft
Length per roll	16.4 ft / 5 meters
Maximum Length	16.4 ft / 5 meters
Width	7/16" / 10 mm
Power per Max Length	50 W
Lumen per Max Length	5,000 lm
Beam Angle	180°
CRI	90 +
Input	24V DC
Dimmable	Yes
LED Operation Type	Constant Voltage
IP Grade	IP 65
Approved Location	Outdoor / Wet Location / Clothes Closets
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Cuttable Increment	2"
LEDs density	384 LEDs / meter
Projected Life	70% Light Output at 20,000 Hours
Certification	cETLus
Warranty	3 year - when installed with a Lotus LED Lights driver
	The warranty is void if installed with an LED driver from another manufacturer

ACCESSORIES

Sold Separately



Strip Connector 8mm no wires model # **LCS-0-8MM**

Single Connector with 6" wire model # **LCS-1-8MM**

Two Connectors with 6" wire model # **LCS-2-8MM**

[Tape to Wire Straight Screw Connector # SC-8-10-TW](#)

[Tape to Tape Straight Screw Connector # SC-8-10-TT-1](#)

[Tape to Tape 90° L-shape Screw Connector # SC-8-10-TT-9](#)

Note: All connectors fit inside the channels we offer

RECOMMENDED DRIVERS

[KVG-24030-DWJ](#)

[KVG-24060-DWJ](#)

[KVG-24096-DWJ](#)

[KVG-C24192-DWJ](#)

[KVG-C24288-DWJ](#)

[SDD-24060-DIM](#)

[SDD-24096-DIM](#)



30W 5-in-1 Dimmable

60W 5-in-1 Dimmable

96W 5-in-1 Dimmable

192W 5-in-1 Dimmable

288W 5-in-1 Dimmable

60W 2-in-1 driver + dimmer

96W 2-in-1 driver + dimmer

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
 Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
 warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
 Delta BC & Mississauga ON