

SC-DL12-D06H-A1-61RE

Lotolite 6" Slim Round Panel LED 1400 lm 12W



Project: _____

Location: _____

Model: _____ Qty: _____

Notes: _____

DESCRIPTION


Lotolite 6" Slim Panel - delivering an impressive high-lumen output of 1400 lm from 12 W, ensuring bright, efficient lighting for any space

FEATURES & BENEFITS


- Up to 120 lm/W - Best in Class Efficiency
- 5 CCT Field Selectable 2700-3000-3500-4000-5000K
- Type IC, Air-Tight & Wet Location Rated - No Housing Required
- CRI 90+ for true color rendering
- 1/2" Ultra Slim Profile

INSTALLATION INSTRUCTIONS

DIMENSIONS ID 5 7/8" OD 6 5/8" Cut Out 6 1/8"

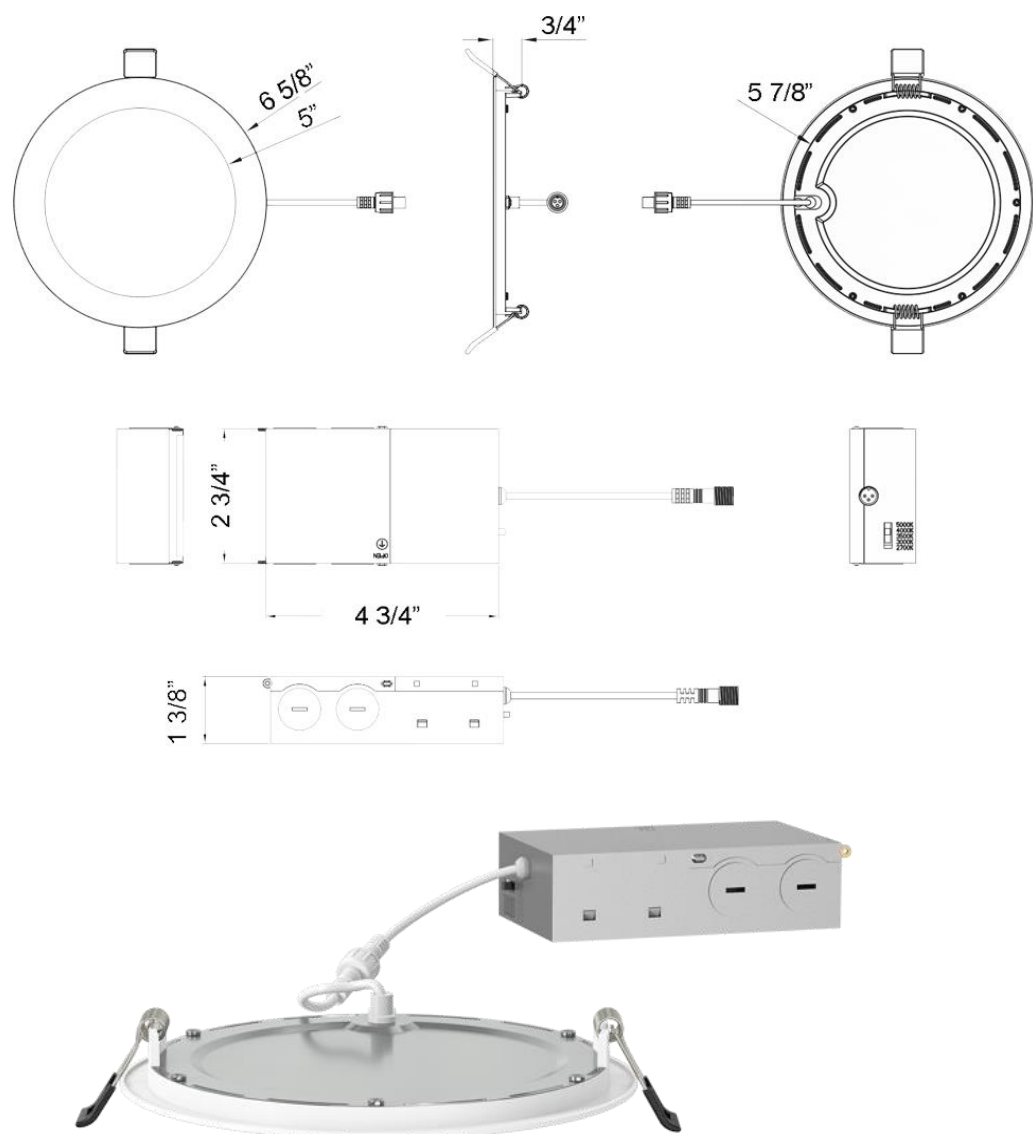

SPECIFICATION	
Applications	Renovations & New Construction
Power	12 W
Color Temperature (K)	2700 - 3000 - 3500 - 4000 - 5000
Light Output (lm)	1330 - 1355 - 1415 - 1450 - 1460
Halogen Equivalent	120 W
Beam Angle	110°
CRI	90+
Driver Input	100-130 V AC
Dimming	TRIAC Dimmers 10% - 100%
Junction Box Volume	8.4 cubic inches / Max 5 No 12 AWG or 7 No 14 AWG
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, FCC, Energy Star, JA8
Warranty	3 Year

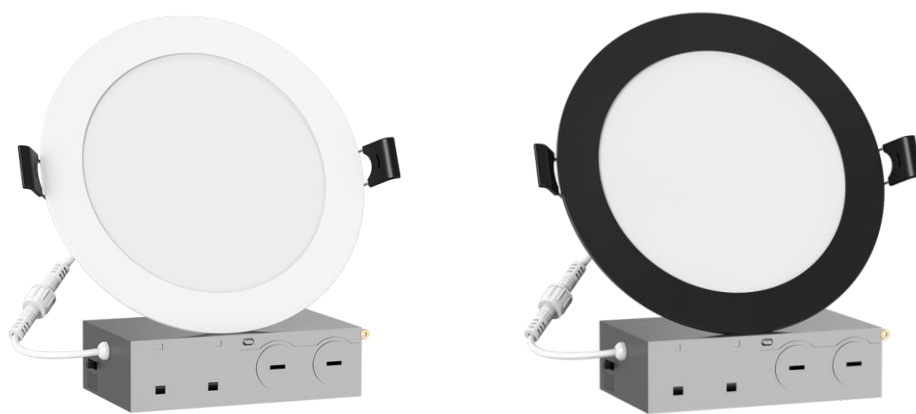

ACCESSORIES

Sold Separately



[13" Mounting Plate Flat model # MP6-2](#)



[26" Flat Rough-In Plates model # RIP6](#)



[Flanged Plate with Hanger Bars - model # FRP6](#)



[Goof Ring OD 7 5/8" White # GR6 Black # GR6-BK](#)



[Jumper Cable 10 ft. Model # JC-5CCT-10](#)



Emergency Driver 8W 120-347V input
[model # BLD-HM08D-YYY](#)

ORDERING GUIDE

SC-DL12-D06H-A1-61RE-WH
SC-DL12-D06H-A1-61RE-BK

[White Trim](#)
[Black Trim](#)



Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON