



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	40W
120V	0.34A	Color Temp	3500/4000/5000K
208V	0.20A	Color Accuracy	81-84 CRI
240V	0.17A	L70 Lifespan	50,000 Hours
277V	0.15A	Lumens	3833-6027 lm
Input Watts	28.4-47.4W	Efficacy	120.3-139 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
2' x 4': 50W/40W/30W (factory default 40W)
Color temperature selectable by 3500K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

CECA Compliant:

Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-4LATM2

Construction

IC Rated:

Suitable for direct contact with insulation

Cold Weather Starting:

The minimum starting temperature is -4°F (-20°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Lens:

Frosted polystyrene

Housing:

Plastic frame & galvanized steel back housing

Finish:

White

Green Technology:

Mercury and UV free. RoHS-compliant components.

LED Characteristics

LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to (3) F32T8 or (3) F28T5

Electrical

Drivers:

30W: Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A
40W: Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.34A, 208V: 0.20A, 240V: 0.17A, 277V: 0.15A
50W: Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.42A, 208V: 0.25A, 240V: 0.21A, 277V: 0.18A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

7.89% at 120V, 6.23% at 277V

Power Factor:

99.32% at 120V, 95.1% at 277V

Technical Specifications (continued)

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

50W: 0.273

40W: 0.333

30W: 0.429

Installation

Mounting:


Recessed into T-grid ceiling. Surface and recessed mounting kits available for drywall ceilings.

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

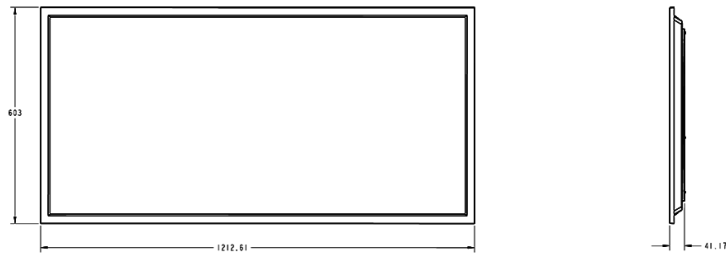

Features

0-10V dimming

50,000-Hour LED lifespan

5-Year, limited warranty

2 per case, must order in case quantity increments

Ordering Matrix

Family	Size/Wattage	Color Temp	Finish	Driver	Options
T34FA	-	2X4			/E
	2X2 = 2' x 2' 40/30/20W 1X4 = 1' x 4' 40/30/20W 2X4 = 2' x 4' 50/40/30W	Blank = 3500/4000/5000K	Blank = White	Blank = 0-10V Dimming, 120-277V	Blank = No Option /LC = Lightcloud /MVS = Microwave Occupancy Sensor /E = Battery Backup