

Project: _____ Type: _____ Prepared By: _____ Date: _____



Features and Benefits

LEDs located on both sides of the tube provides 360-degree light output
 Optics designed to deliver smooth even light without hot spots
 Multiple lengths available for any application needed
 120V-277V - Universal voltage
 Ambient temperature: -20°C/-4°F to 55°C/131°F
 Rotatable endcaps allow installer to direct light where needed
 Robust plastic and aluminum construction to minimize breakage
 Mercury and UV free. RoHS-compliant components.
 Double-ended bypass installation for simple install and reduced maintenance costs

Technical Specifications		
Performance	Bulb Shape:	Power Factor:
Product Type: Linear	T8	>0.9
Input Wattage: 15W	Nominal Length: 3 ft	Operating Frequency: 50/60Hz
Lumens: 1,950lm	Finish: Clear	Dimmable: No
Efficacy: 130lm/W	Installation	Input Voltage: 120-277V AC
L70 Lifespan: 50,000 Hours	Base Type: R17d	Other
Accessories: Cable Kit 4FT: ST-4L-CABLE-KIT Cable Kit 6FT: ST-6L-CABLE-KIT Surge Protector Compatibility: SP10KV	Installation Type: Type B, Ballast Bypass	Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty .
Construction	LED Characteristics	Compliance
Material: Plastic and Aluminum	Color Temperature: 6500K Daylight Deluxe	UL Listed: Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.
	Color Accuracy (CRI): 80 CRI	
	Electrical	
	THD: <20%	

Technical Specifications (continued)

California Energy Commission (CEC) Status:

Lawful for Sales in California

Application:



Suitable for damp locations and totally enclosed fixtures.

\ _____

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	10	7.7	3	39
PALLET	660	39.4	43.3	47.2

Wiring Diagram

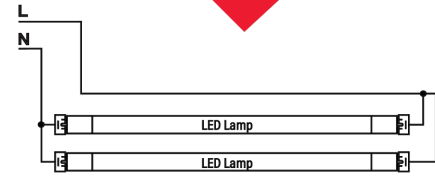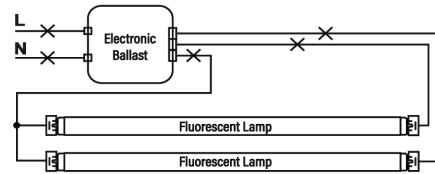

Dimension

