

Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------



Features and Benefits

- Direct Replacement for Fluorescent Lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W
- Easy to install plug and play that requires no rewiring, no tools, no instructions
- 50,000 hour Lifespan
- Rated for use in enclosed and open fixtures in dry or damp locations
- Diffused frosted lens will maintain the same light quality over time
- Compatible with most instant start electronic T8 ballasts, Please check Compatibility List
- Approximately 40% more efficient than fluorescent T8 lamps
- Instant on full brightness
- Environmentally friendly, no mercury used
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)
- Shatterproof rugged thermoplastic nano-polycarbonate design
- Compatible with RAB specified 0-10V dimming system

Technical Specifications		
Performance	Nominal Length:	Installation Type:
Product Type: Linear	2 ft	Type A, Plug and Play
Input Wattage: 6W	Finish: Frosted	Electrical
Lumens: 800lm	For Use Outdoors in Open Fixtures: No	THD: <25%
Efficacy: 133lm/W	LED Characteristics	Power Factor: Ballast Dependent
L70 Lifespan: 50,000 Hours	Color Temperature: 3500K Neutral White	Operating Temperature: -20°C to 45°C (-4°F to 113°F)
Wattage Equivalency: 17W Fluorescent	Color Accuracy (CRI): 80 CRI	Dimming: Yes with 0-10V dimmer & plus; ballast. See Dimmer Compatibility List.
Construction	Beam Angle: 220°	Input Voltage: Ballast Dependent
Material: Plastic	Installation	Operating Frequency: Ballast Dependent
Bulb Shape: T8	Base Type: G13	Input Current @ 120V: Ballast Dependent

Technical Specifications (continued)

Input Current @ 277V:

Ballast Dependent

Flicker:

Ballast Dependent

Other**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Compliance**UL Listed:**

Yes

NSF Listed:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

Certification Model Number:

T8-6-24P-835-DIR

California Energy Commission (CEC) Status:

Lawful for Sales in California

Application:

Suitable for damp locations and totally enclosed fixtures.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLJGRAOZXS1U


Ballast Performance

	0.78BF	0.88BF	1.88BF
Lumens	740	850	1045
System Power (W)	6.5	7.4	9


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	24.6	6.7	7
PALLET	60	49.2	39.4	45.3

Wiring Diagram

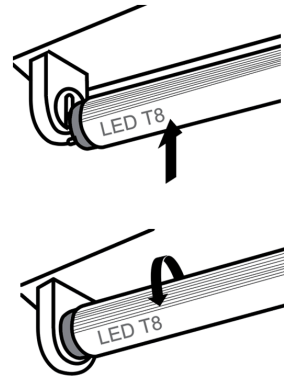

Dimension

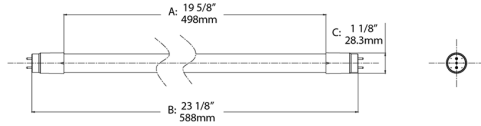

Light Distribution

