

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	24/18/12W
120V	0.20A/0.14A/0.10A	Color Temp	3000/3500/4000/5000K
208V	0.13A/0.10A/0.07A	Color Accuracy	82-84 CRI
240V	0.10a/0.08A/0.06A	L70 Lifespan	100,000 Hours
277V	0.09A/0.07A/0.05A	Lumens	1,617-3,285 lm
Input Watts	12.4-23.4W	Efficacy	128.3-141.4 lm/W

## Technical Specifications

### Field Adjustability

#### Field Adjustable:

Field Adjustable Light Output:  
24W/18W/12W (factory default 18W)  
Color temperature selectable by 5000K, 4000K, 3500K and 3000K (factory default: 4000K)

### Compliance

#### UL Listed:

Suitable for damp locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-QVC7KF

### Electrical

#### Driver:

24W: Class 2, Class P, Constant Current, 120-277V, 50/60 Hz, 120V: 0.20A, 208V: 0.13A, 240V: 0.10A, 277V: 0.09A  
18W: Class 2, Class P, Constant Current, 120-277V, 50/60 Hz, 120V: 0.14A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A  
12W: Class 2, Class P, Constant Current, 120-277V, 50/60 Hz, 120V: 0.10A, 208V: 0.07A, 240V: 0.06A, 277V: 0.05

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 5%.

#### THD:

8.63% at 120V, 8.7% at 277V

#### Power Factor:

97.4% at 120V, 92.9% at 277V

#### Surge Protection:

1-2kV

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### LED Characteristics

#### LEDs:

Long-life, high-efficiency, surface-mount LEDs

#### Color Consistency:

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 55°C (131°F)

#### Housing:

Cold Rolled Carbon Steel Sheets and Strip (SPCC)

#### Lens:

Diffused Polymethyl Methacrylate (PMMA)

#### Finish:

Formulated for high durability and long-lasting color

## Technical Specifications (continued)

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Installation**

---

**Mounting:**

Wall mount

**Other**

---

**Lighting Pattern:**

70% downlight, 30% uplight

**Accessories:**

Fixture to fixture connector: [TOMO CONNECT](#)

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Sensor Settings**

---

**Operating Voltage:**

120-277V

**Stand by Power:**

<0.5W

**Load Ratings:**

200VA @ 120V capacitive (LED)

400VA @ 277V capacitive (LED)

**Warming-up:**

30s

**Sensor Principle:**

PIR detection

**Detection Range:**

Max height: 16ft (5m)

Max Diameter: 20ft (6m)

**Detection Angle:**

360°


**Operating Temperature:**

-20°C to 60°C (-4°F to 140°F)

**IP Rating:**

IP20

## Dimensions

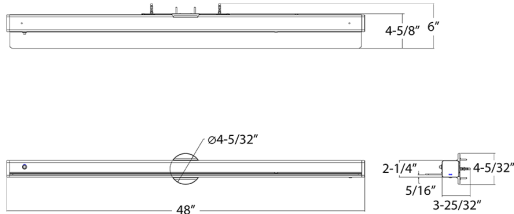

## Features

- 0-10V dimming
- 100,000-Hour LED lifespan
- 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Length (Wattage)	Color Temp	Finish	Mounting	Driver	Options
TOMO	4			WM		/PIR
	2 = 2' (12/9/6W) 4 = 4' (24/18/12W) 8 = 8' (48/36/24W)	<b>Blank</b> = 3000/3500/4000/5000K CCT Adjustable	<b>Blank</b> = White	<b>WM</b> = WM	<b>Blank</b> = 120-277V, 0-10V Dimming	/LCBS/E = Lightcloud Blue w/PIR Sensor and Battery Backup <sup>1</sup> /LCB/E = Lightcloud Blue-enabled w/Battery Backup <sup>1</sup> /LCBS = Lightcloud Blue-enabled w/PIR sensor /LCB = Lightcloud Blue-enabled /PIR/E = Passive Infrared Occupancy Sensor w/Battery Backup <sup>1</sup> /LC/E = Lightcloud w/Battery Backup <sup>1</sup> /LCS = Lightcloud /LC = Lightcloud /E = Battery Backup <sup>1</sup> /PIR = Passive Infrared Occupancy Sensor <b>Blank</b> = No Option

<sup>1</sup> \*Available only for 4' and 8'